
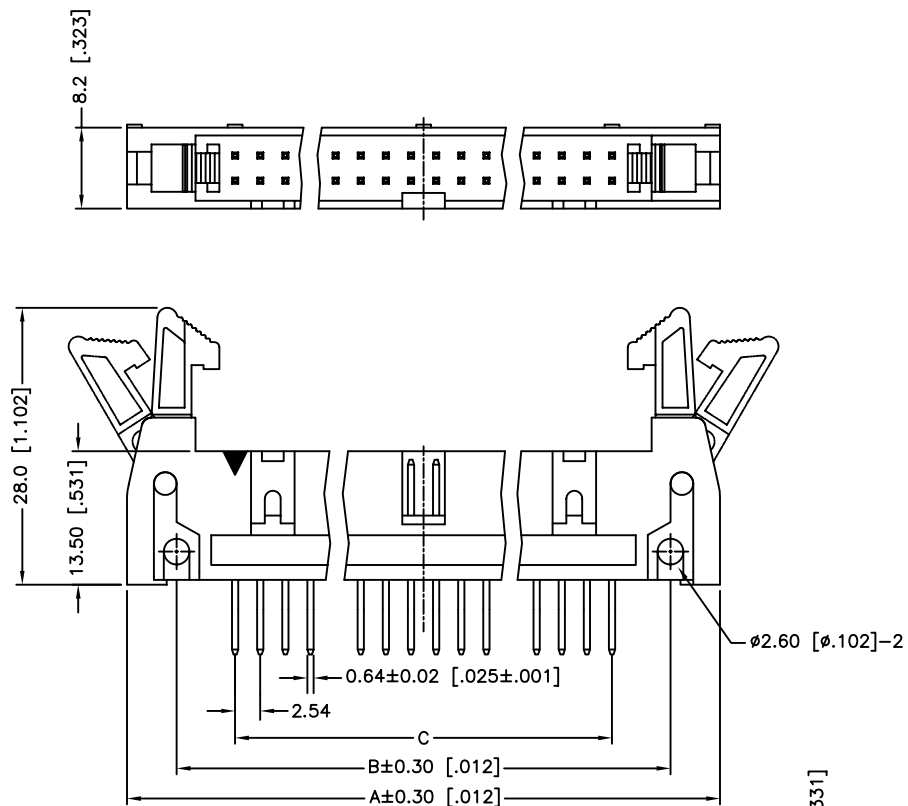


RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW

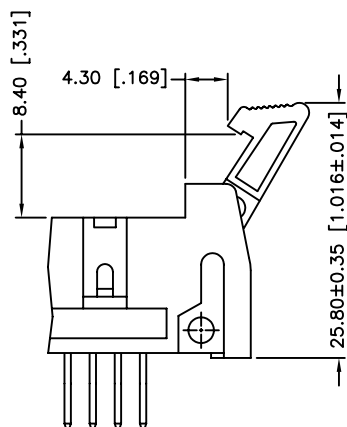

MATERIALS

1. HOUSING : P.B.T. (UL 94V-0), BLACK.
2. TERMINAL : S.Q. 0.64mm BRASS.

SPECIFICATION

1. CURRENT RATING : 3 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE :
1000V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000M OHMS MIN.
AT 1000V DC.
4. OPERATING TEMPERATURE : -55°C TO +105°C.

Number Of Position	DIMENSIONS		
	A	B	C
10	32.00[1.260]	21.84[.860]	10.16[.400]
14	37.08[1.460]	26.92[1.060]	15.24[.600]
16	39.62[1.560]	29.46[1.160]	17.78[.700]
20	44.70[1.760]	34.54[1.360]	22.86[.900]
24	49.78[1.960]	39.62[1.560]	27.94[1.100]
26	52.32[2.060]	42.16[1.660]	30.48[1.200]
30	57.40[2.260]	47.24[1.860]	35.56[1.400]
34	62.48[2.460]	52.32[2.060]	40.64[1.600]
40	70.10[2.760]	59.94[2.360]	48.26[1.900]
50	82.80[3.260]	72.64[2.860]	60.96[2.400]
60	95.50[3.760]	85.34[3.360]	73.66[2.900]
64	100.58[3.960]	90.42[3.560]	78.74[3.100]

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

L-DW13-xx-LF
SERIES | LEADFREE
10~64 WAY
13.0mm
WIRE WRAP
DIP 180°

DESCRIPTION: 2.54mm PITCH P.C.B. MOUNT VERTICAL, EJECTOR TYPE