


10P.14P.16P

Polyester,UL 94V-0

Max Processing Temp: 260° C for 10 seconds

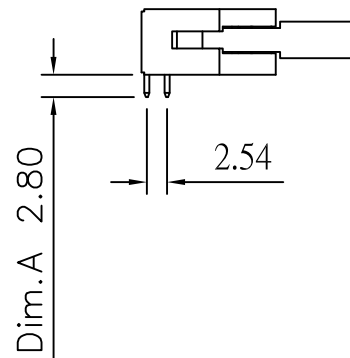

Recommended P.C. Board Hole Layout

CONTACTS	10 pin	12 pin	14 pin	16 pin	20 pin	24 pin
A	31.90	34.44	36.98	39.52	44.60	49.68
B	10.16	12.70	15.24	17.78	22.86	27.94
C	18.00	20.54	23.08	25.62	30.70	35.78
D	NO	NO	NO	NO	YES	YES
E	27.92	30.46	33.00	35.54	40.62	45.70
CONTACTS	26 pin	30 pin	34 pin	40 pin	50 pin	
A	52.15	57.40	62.38	70.00	82.70	
B	30.48	35.56	40.64	48.26	60.96	
C	38.32	43.40	48.48	56.10	68.80	
D	YES	YES	YES	YES	YES	
E	48.24	53.32	58.40	66.02	78.72	

TOLERANCES ARE

SIZE A4	PPROJECT
---------	----------

PJECTION

照片框

ORDER INFORMATION

L-RD28GE-xx-LF

SERIES

GRAY

DIP 2.8mm

DIP 90°

10~50 WAY

LEADFREE

DESCRIPTION: