
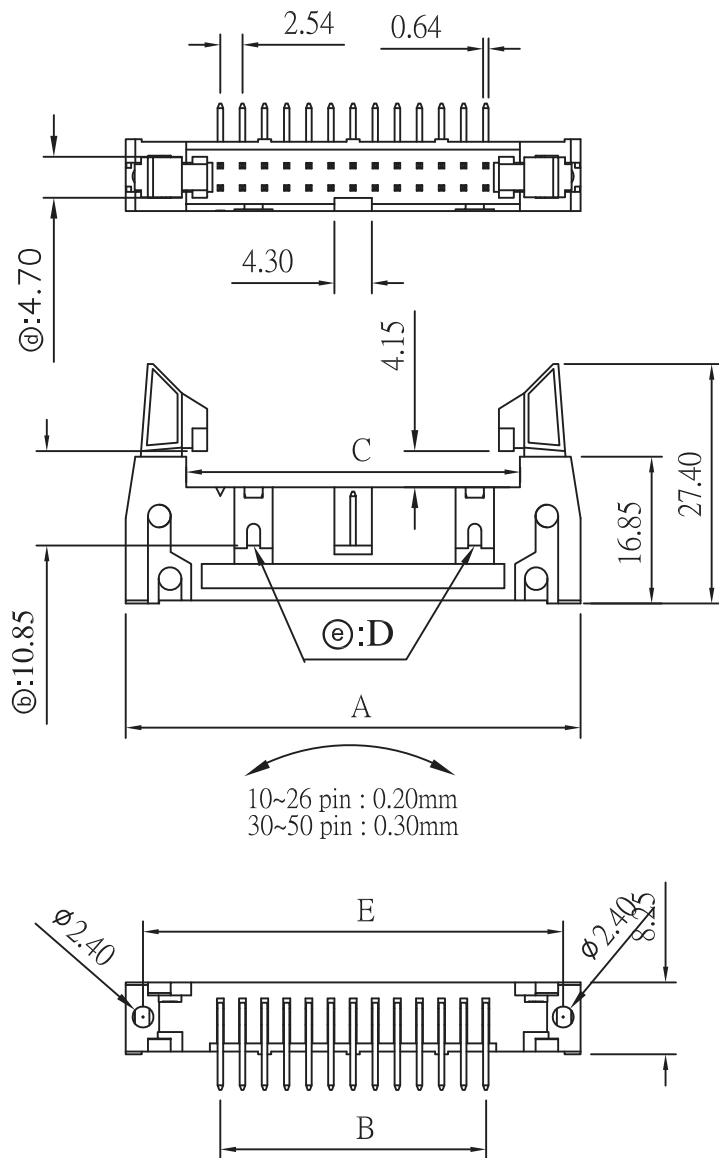



Current Rating Voltage: 3 Amps 250V AC (r.m.s)  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max.  
 Dielectric Withstanding: 1000 V AC  
 Operating Temperature: - 40° ~ +105° C  
 Contact Material: Copper Alloy  
 Standard: Brass  
 Insulator Material: Polyester, UL 94V-0  
 Standard: PBT  
 Finish: Standard: Gold Flash all over  
 Insulator Material: High Temperature  
 Polyester, UL 94V-0  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds

| CONTACTS | 10 pin | 12 pin | 14 pin | 16 pin | 20 pin | 24 pin |
|----------|--------|--------|--------|--------|--------|--------|
| A        | 31.90  | 34.44  | 36.98  | 39.52  | 44.60  | 49.68  |
| B        | 10.16  | 12.70  | 15.24  | 17.78  | 22.86  | 27.94  |
| C        | 18.00  | 20.54  | 23.08  | 25.62  | 30.70  | 35.78  |
| ⊙: D     | NO     | NO     | NO     | NO     | YES    | YES    |
| E        | 27.92  | 30.46  | 33.00  | 35.54  | 40.62  | 45.70  |
| CONTACTS | 26 pin | 30 pin | 34 pin | 40 pin | 50 pin |        |
| A        | 52.15  | 57.40  | 62.38  | 70.00  | 82.70  |        |
| B        | 30.48  | 35.56  | 40.64  | 48.26  | 60.96  |        |
| C        | 38.32  | 43.40  | 48.48  | 56.10  | 68.80  |        |
| ⊙: D     | YES    | YES    | YES    | YES    | YES    |        |
| E        | 48.24  | 53.32  | 58.40  | 66.02  | 78.72  |        |

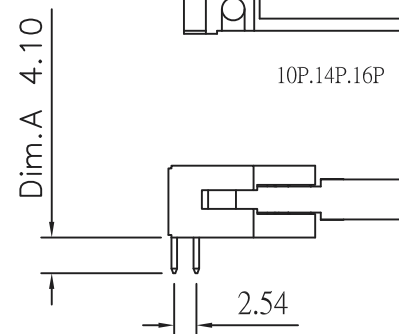

10P.14P.16P

Recommended P.C. Board  
 Hole Layout

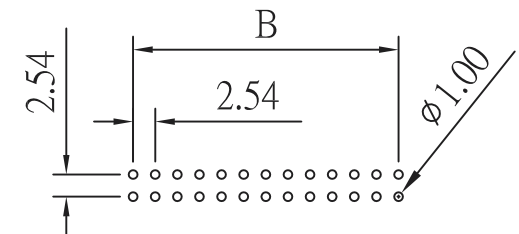

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±  
 .X ± 0.30  
 .XX ± 0.20  
 .XXX ± 0.10  
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

L-RS-xx-LF  
 SERIES LEADFREE  
 10~50 WAY  
 SHORT LATCH  
 DIP 90°

DESCRIPTION: