
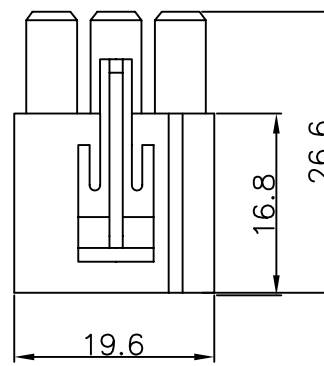
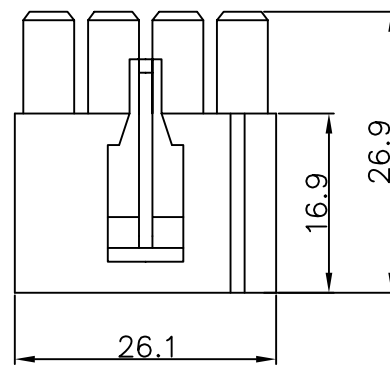
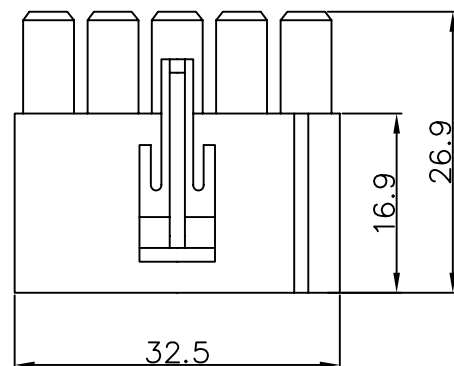
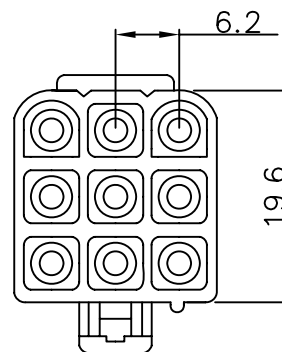



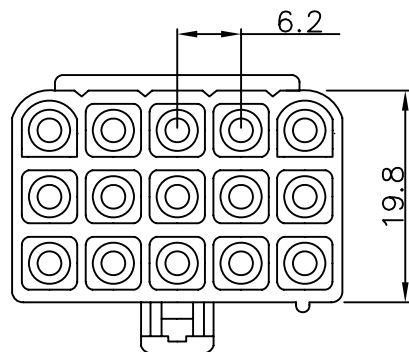

L-S-3X05

L-S-3X04

L-S-3X03

SPECIFICATIONS

Circuit:1,2,3,4,6,9,12,15

Voltage rating:300V AC,DC

Current rating:12A AC,DC

Withstanding voltage:1500V AC/minute

Insulation resistance:1000M Ω HM min

Temperature range:-25 C~+90 C

Material:UL94V-2 nylon 66

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$


.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$

PPOJECTION



ORDER INFORMATION

L-S-3Xxx-LF
SERIES | LEADFREE
3X03:09 WAY
2X05:15 WAY
FEMALE HOUSING

DESCRIPTION: