


Features

1.6mmX0.8mm SMT LED, 0.65mm thickness.
Low power consumption.
Wide viewing angle.
Ideal for backlight and indicator.
Package: 2000pcs / reel.
Moisture sensitivity level : level 3.
RoHS compliant.

Descriptions

The Blue source color devices are made with InGaN on SiC Light Emitting Diode.
Electrostatic discharge and power surge could damage the LEDs.
It is recommended to use a wrist band or anti-electrostatic glove when handling the LEDs.
All devices, equipments and machineries must be electrically grounded.

Package Dimensions

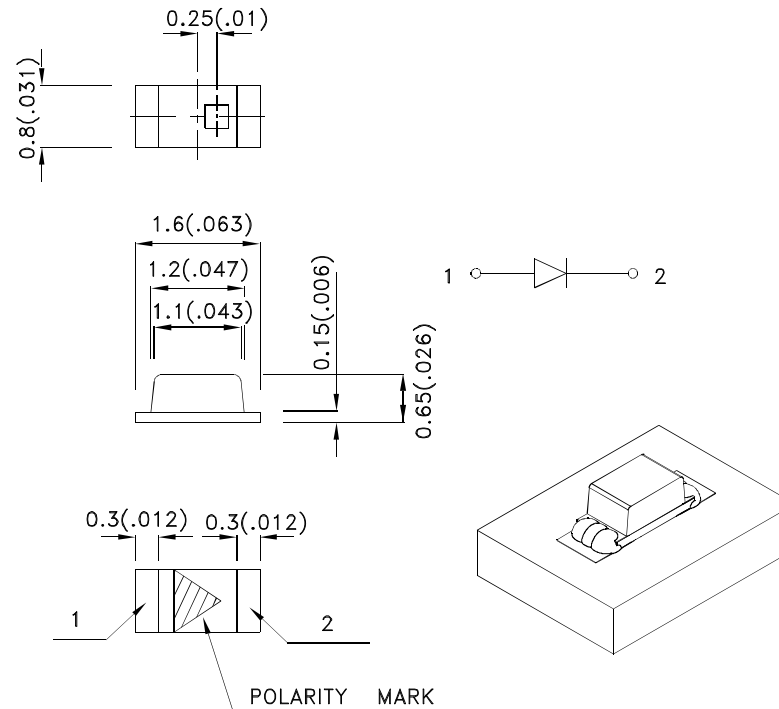

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is 0.1(0.004") unless otherwise noted.
3. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.
4. The device has a single mounting surface. The device must be mounted according to the specifications.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

LED-VBL-06-LF
SERIES | T | LEADFREE
| | HIGH 0.65mm
| | BLUE
| | 180°SMT

DESCRIPTION: