

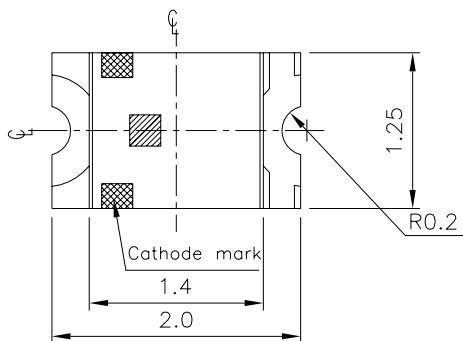
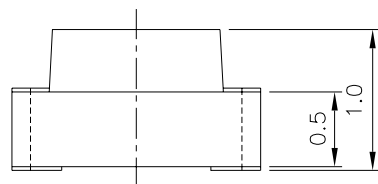


Device Selection Guide

Part No.	Chip	Emitted Color	Resin Color
	Material		
LED-VBLR-10B	InGaN	Blue	WaterClear

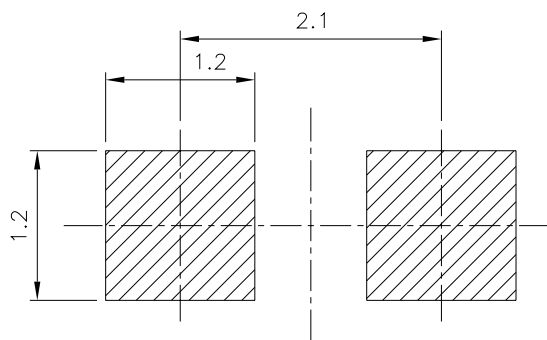

For reflow soldering (Propose)

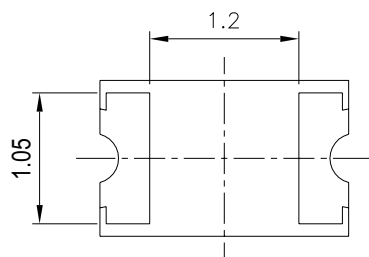

Note: The tolerances unless mentioned is $\pm 0.1\text{mm}$, Unit = mm

LED-VBLR-10B-LF
REEL LEADFREE
RoHS Compliant



PART NO. LED-VBLR-10B

DWG NO. LED-VBLR-10B

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG

DESCRIPTION:

AREA

REVISIONS

DATE

煜倫股份有限公司



Label explanation

CAT: Luminous Intensity Rank


HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank


Reel Dimensions

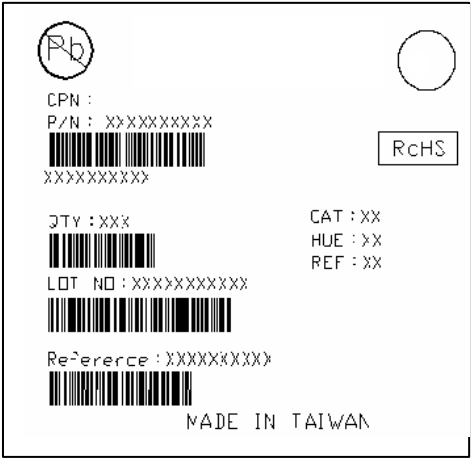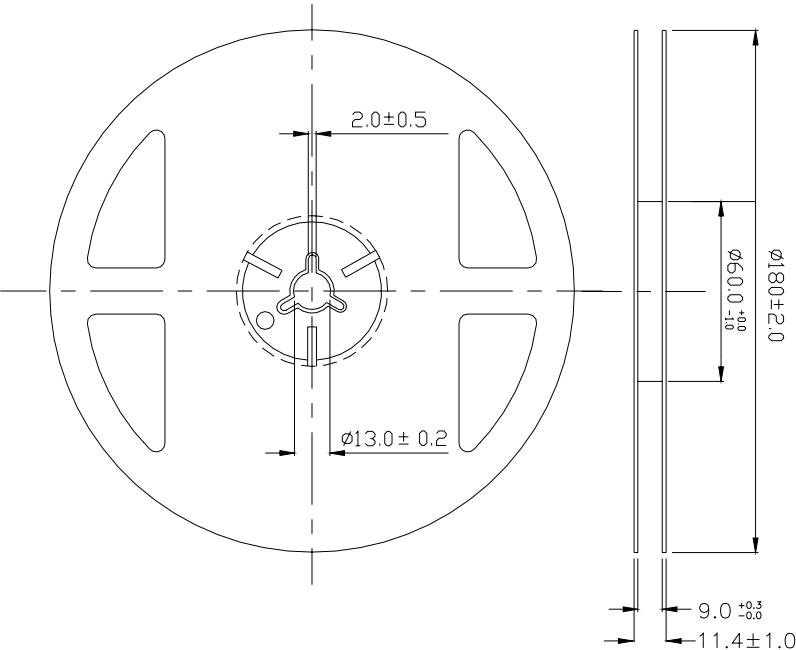

Note: The tolerances unless mentioned is $\pm 0.1\text{mm}$,Unit = mm


MORETHANALL CONNECTORS ASSEMBLIES 煜倫股份有限公司	PART NO. LED-VBLR-10B											
	DWG NO. LED-VBLR-10B		CHECKED BY CY		TOLERANCES ARE X. ± .X ± .XX ± .XXX ± ANG	DESCRIPTION:						
	FILE NO.		DRAWING BY									
	UNIT / mm	SCALE 1:1	PROJECTION 			AREA	REVISIONS		DATE			

Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

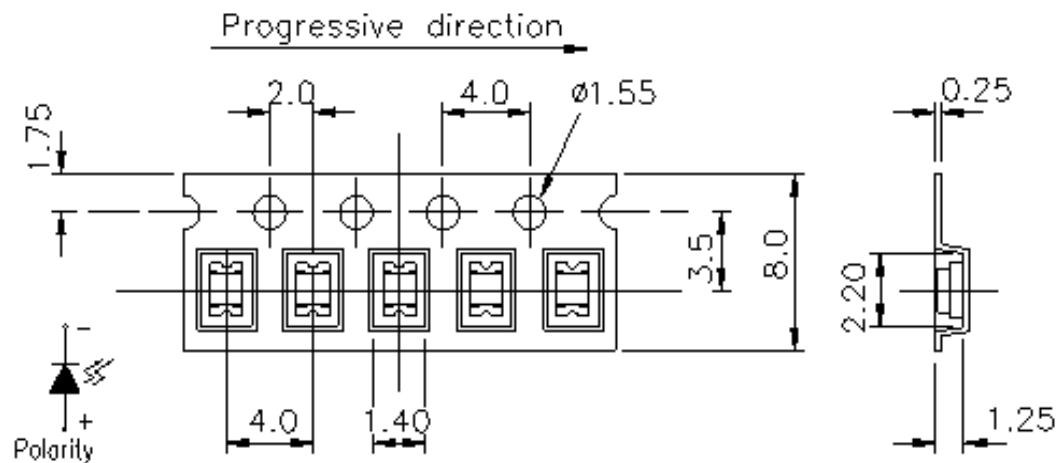

Note: The tolerances unless mentioned is $\pm 0.1\text{mm}$,Unit = mm

Moisture Resistant Packaging

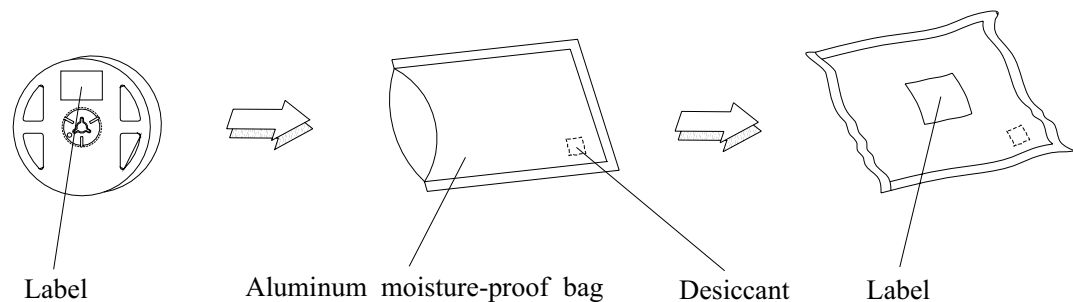

MORETHANALL CONNECTORS ASSEMBLIES 煜倫股份有限公司	PART NO. LED-VBLR-10B		TOLERANCES ARE X. ± .X ± .XX ± .XXX ± ANG	DESCRIPTION:					
	DWG NO. LED-VBLR-10B				CHECKED BY CY				
	FILE NO.			DRAWING BY	AREA	REVISIONS		DATE	
	UNIT / mm	SCALE 1 : 1		PROJECTION 					