

Features:

- 2 ~ 12 circuits available
- Pin material: Brass
- .045"(1.14mm) square pin



Dimensional Information (mm)

Circuits	Dim. A	Dim. B
N	$5.08 \times (N - 1)$	$5.08 \times N$

&& N = 2 ~ 12

Specification:

- Current rating: 7A
- Voltage rating: 250V AC, DC
- Contact resistance: 10mΩ Max.
- Insulation Resistance: 1000MΩ Min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C
(including temperature rise)

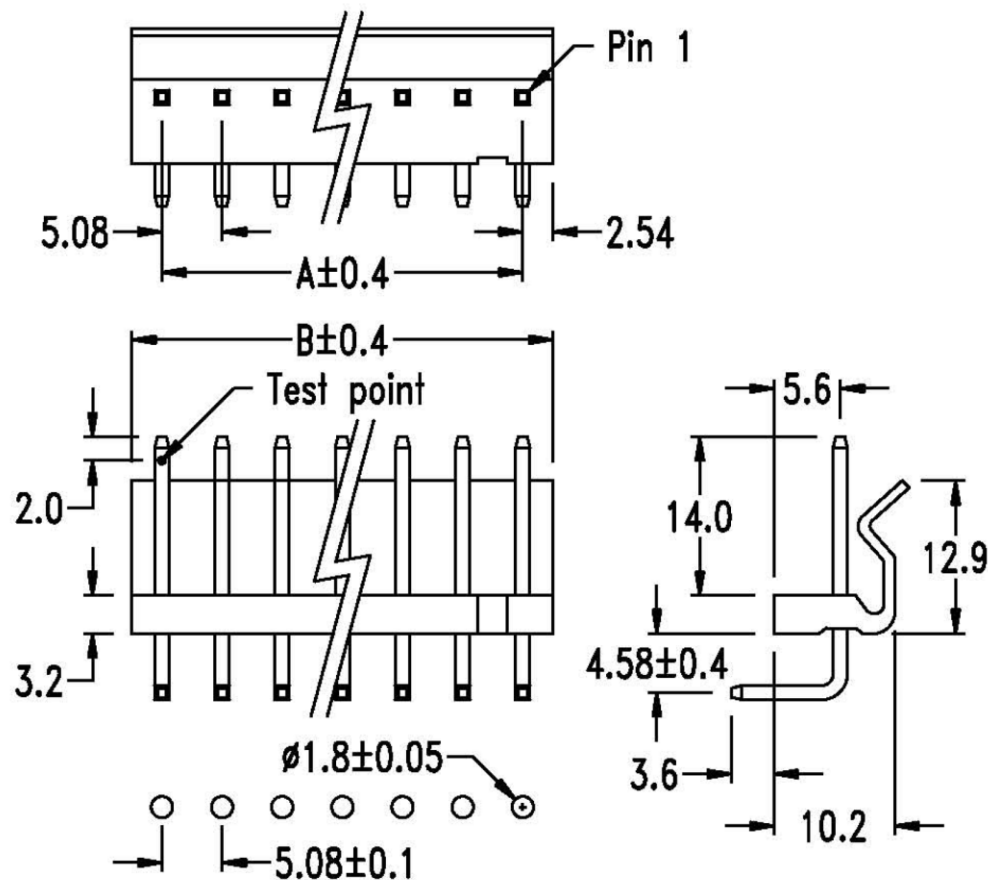

P. C. board hole dimensions

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

LKS-R-xx-LF
SERIES | LEADFREE
02~12WAY
DIP 90°

DESCRIPTION: