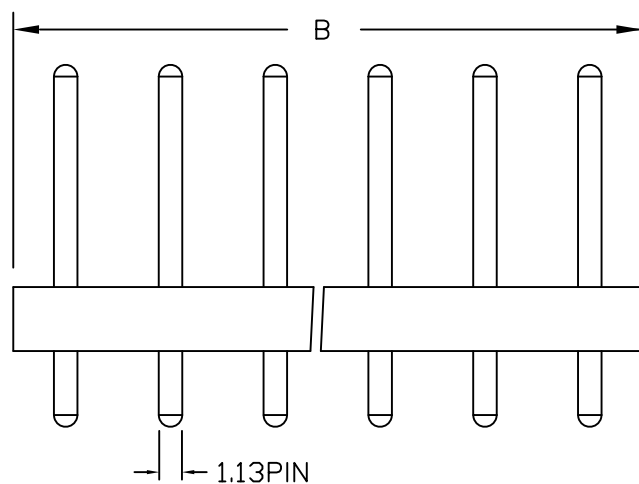
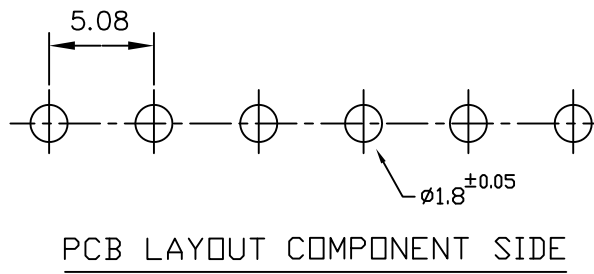
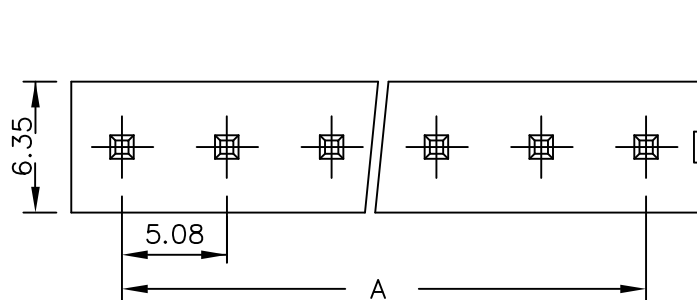


SPECIFICATIONS

Electrical

Current Rating: 5A AC, DC

Voltage Rating: 250V AC, DC

Operating Temp.: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Insulation Resistance: $1000\text{M}\Omega / \text{min.}$

Dielectric Withstanding Voltage: $1500\text{V AC} / \text{min.}$

Contact Resistance: $10\text{m}\Omega / \text{max.}$

Material

Material: Nylon66, UL94V-2

Poles	Dimension mm (in.)	
	A	B
2	5.08	10.30
3	10.16	15.40
4	15.24	20.50
5	20.32	25.60
6	25.40	30.70
7	30.48	35.80
8	35.56	41.00
9	40.64	46.10
10	45.72	51.20

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.50
.XX $\pm$ 0.30
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

LKX-DRP-xx-LF
SERIES | LEADFREE
02~14WAY
ROUND PIN
DIP 180°

DESCRIPTION: 5.08mm Wire-to-Board Header Dip 180° Type