
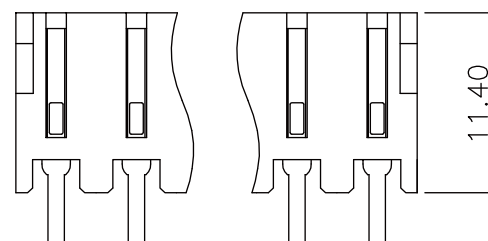
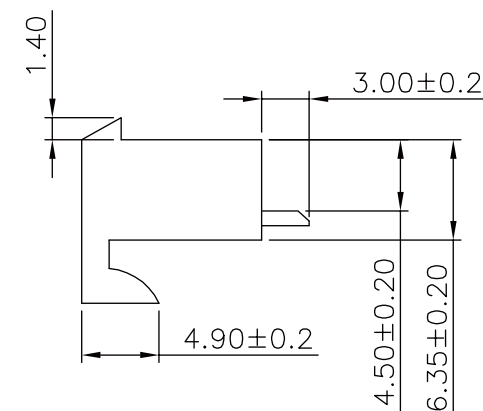


FEATURES:

- 2–20 Circuits
- Housing, UL 94V–2 Nylon 6/6, Natural
- Designed for parallel and perpendicular board stacking, connection
- Mates with .045"[1.14mm] square pins

SPECIFICATIONS:

- Current rating: 7A AC, DC
- Voltage rating: 250V AC, Maximum
- Temperature range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- Contact resistance: Initial Value/10m Ω max.
After environmental testing
/20m Ω max.
- Insulation resistance: 5000 M Ω min
- Withstand Voltage: 1500V AC/minute
- Applicable PC board thickness: .063"[1.6mm]

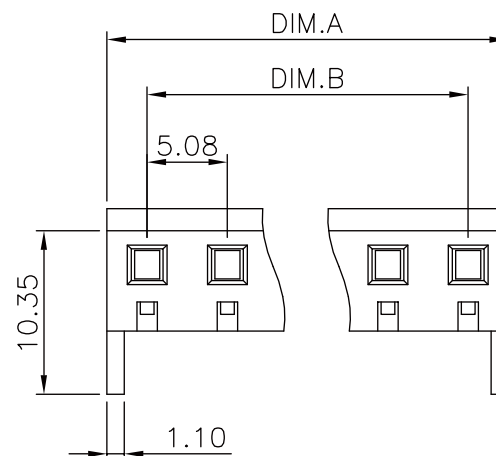

PIN 數	DIM.A	DIM.B	Tolerances
02	10.16	5.08	±0.25
03	15.24	10.16	
04	20.32	15.24	
05	25.40	20.32	
06	30.48	25.40	
07	35.56	30.48	
08	40.64	35.56	±0.30
09	45.72	40.64	
10	50.80	45.72	
11	55.88	50.80	
12	60.96	55.88	
13	66.04	60.96	

PIN 數	DIM.A	DIM.B	Tolerances
14	71.12	66.04	±0.36
15	76.20	71.12	
16	81.28	76.20	
17	86.36	81.28	
18	91.44	86.36	
19	96.52	91.44	
20	101.6	96.52	±0.42

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

TOLERANCES ARE

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ±



ORDER INFORMATION

LKX-T-xx-LF
SERIES | LEADFREE
02~20WAY
TOP ENTRY

DESCRIPTION: