
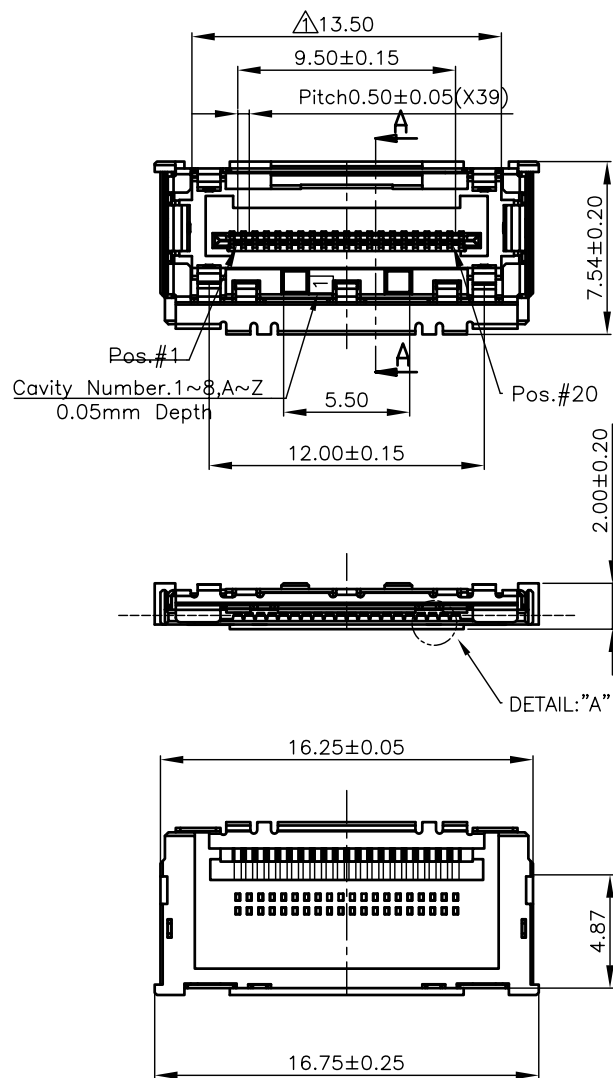


SECTION: A--A (2:1)

NOTE:

1. MATERIAL- INSULATOR: LCP, UL94-V0, BLACK
INNER SHELL: COPPER ALLOY.
CONTACT: COPPER ALLOY
2. FINISH - CONTACT 1~3u" GOLD ON CONTACT AREA
GOLD FLASH ON OTHER AREA, BOTH OVER NICKEL.
3. FINISH - INNER SHELL : M=TIN 80u"(MATTE) OVER 50u" NICKEL.
4. OUTER SHELL MATERIAL&FINISH SEE PAGE 2(NOTE)

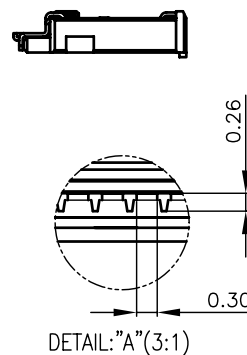

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.35
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG $\pm 3^\circ$





PPOJECTION

照片框




ORDER INFORMATION

LVC-HS32R-20-LF
SERIES REEL 20WAY LEADFREE
32AWG
SOLDER HOUSING

DESCRIPTION:

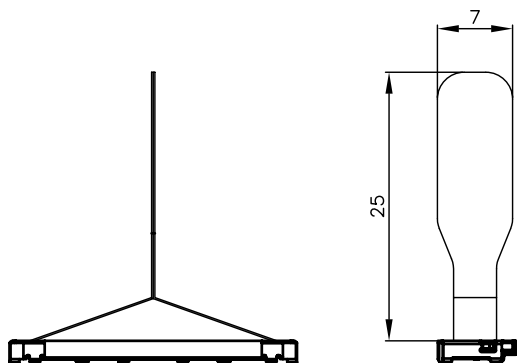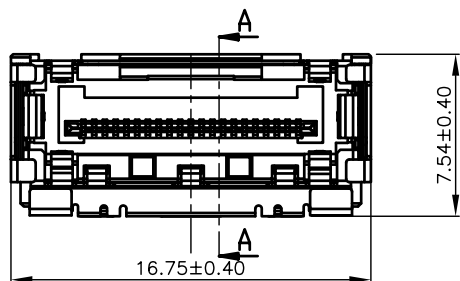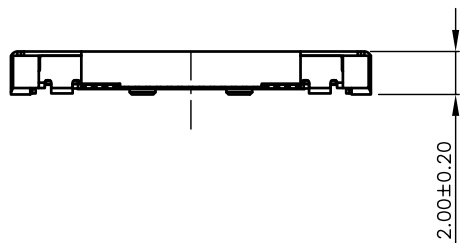

PULL TAB INSTALLATION CONDITION(2:1)

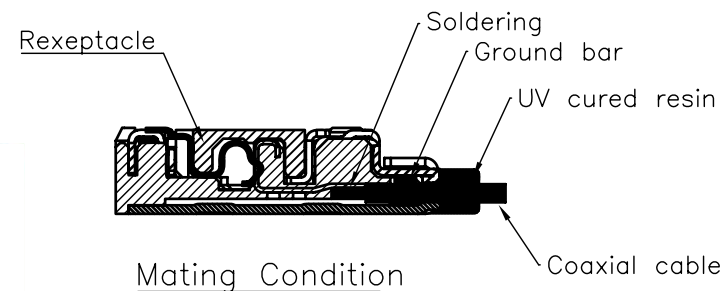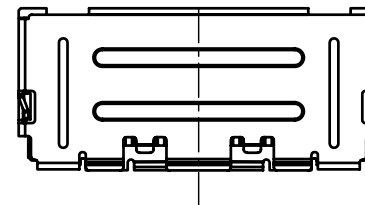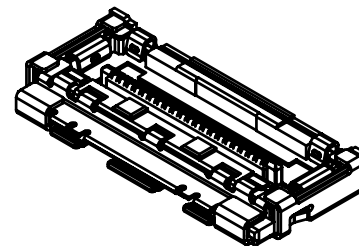

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4






X. ± 0.35
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ± 3°

PPOJECTION

ORDER INFORMATION

LVC-HS32R-20-LF
SERIES REEL 32AWG SOLDER HOUSING
LEADFREE 20WAY

DESCRIPTION:

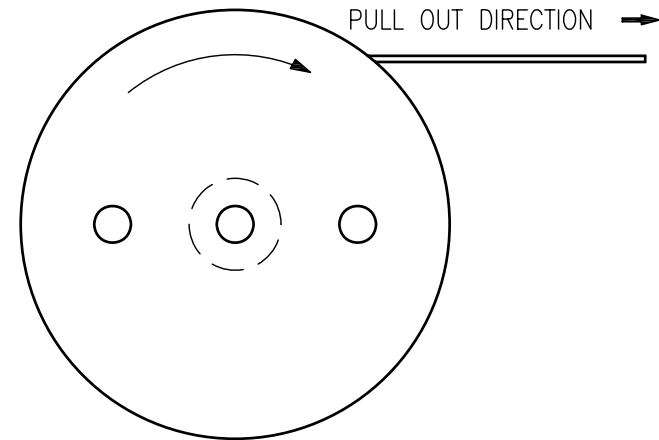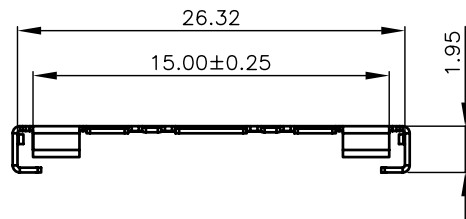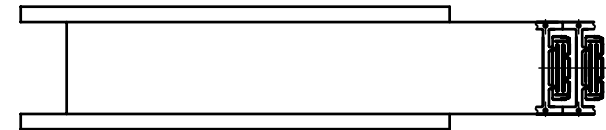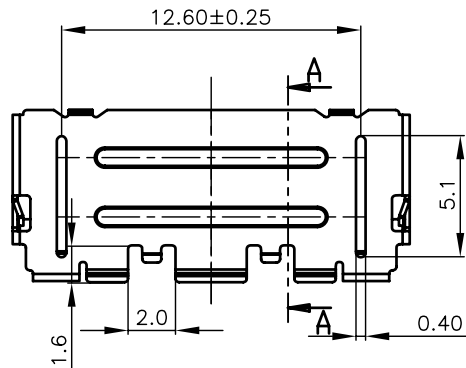

NOTES:

1. MATERIAL:
STAINLESS STEEL T=0.20mm
- 2.FINISH:
O. UNPLATING.
M. TIN 80u"(MATTE) OVER 20u" NICKEL .
3. PACKING: 5,000pcs/REEL

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.35
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

LVC-HS32R-20-LF
SERIES REEL LEADFREE
20WAY
32AWG
SOLDER
HOUSING

DESCRIPTION: