

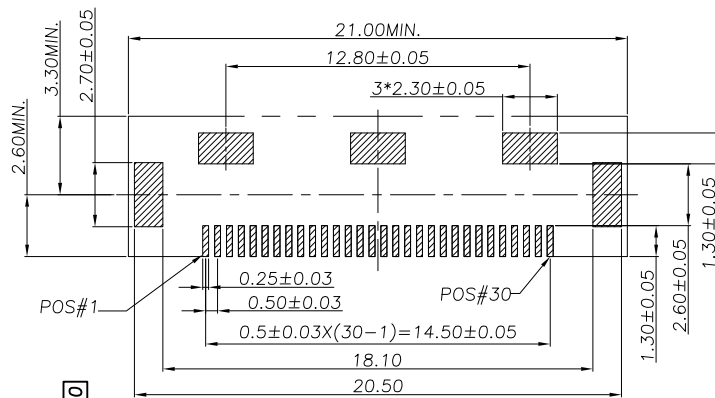
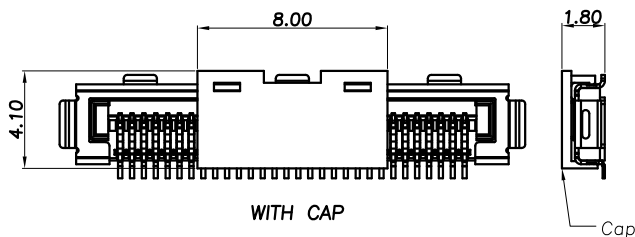
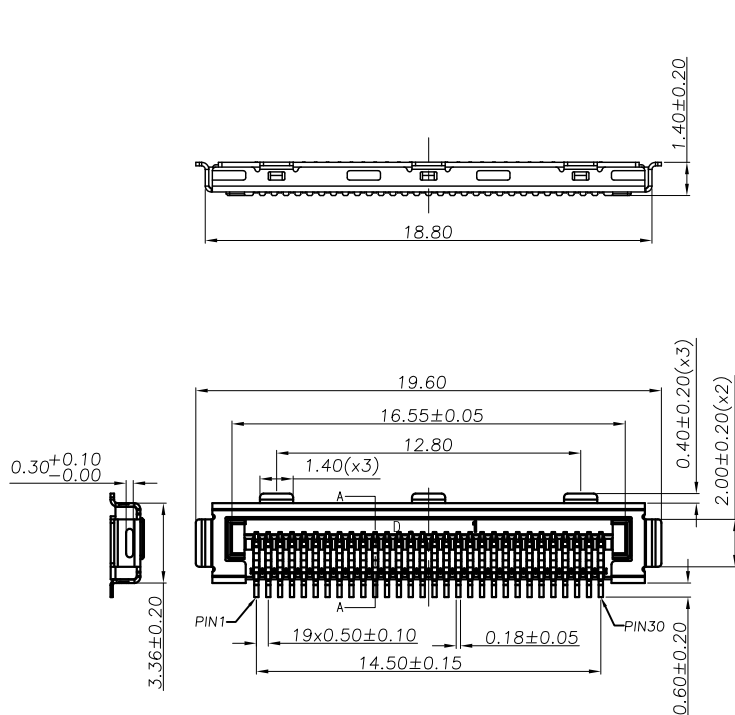


RECOMMENDED P.C.B LAYOUT
GENERAL TOLERANCE:±0.05

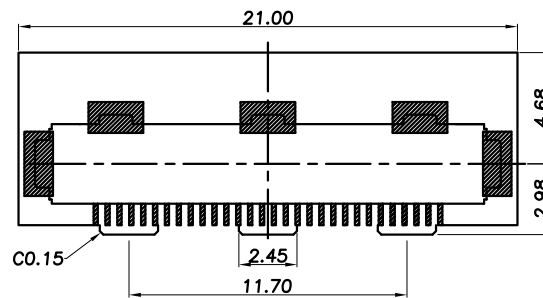

- NOTES:
- 1.MATERIAL:
HOUSING: THERMOPLASTIC UL94V-0;COLOR:BLACK
TERMINAL: COPPER ALLOY,T=0.10mm
SHELL: STAINLESS STEEL,T=0.15mm
CAP: THERMOPLASTIC UL94V-0;COLOR:BLACK
MYLAR: POLYAMIDE TAPE
- 2.FINISH:
TERMINAL: GOLD PLATING ON CONTACT AREA AND
1~3u" GOLD PLATING ON SOLDER AREA
50u" MIN. NICKEL UNDER-PLATING OVER ALL
SHELL: 80u" MATTE TIN PLATING OVER ALL
50u" MIN. NICKEL UNDER-PLATING OVER ALL

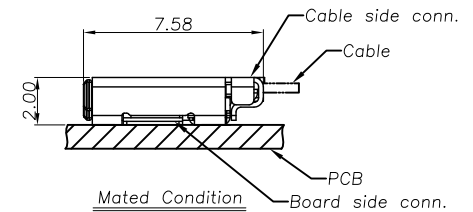

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ±
ANG ±

照片框

ORDER INFORMATION

LVC-VXC-30-LF
SERIES T T LEADFREE
30 WAY
CAP
NON POST
180°SMT

DESCRIPTION: LVDS 0.5PH 30PIN RECEPTACLE