





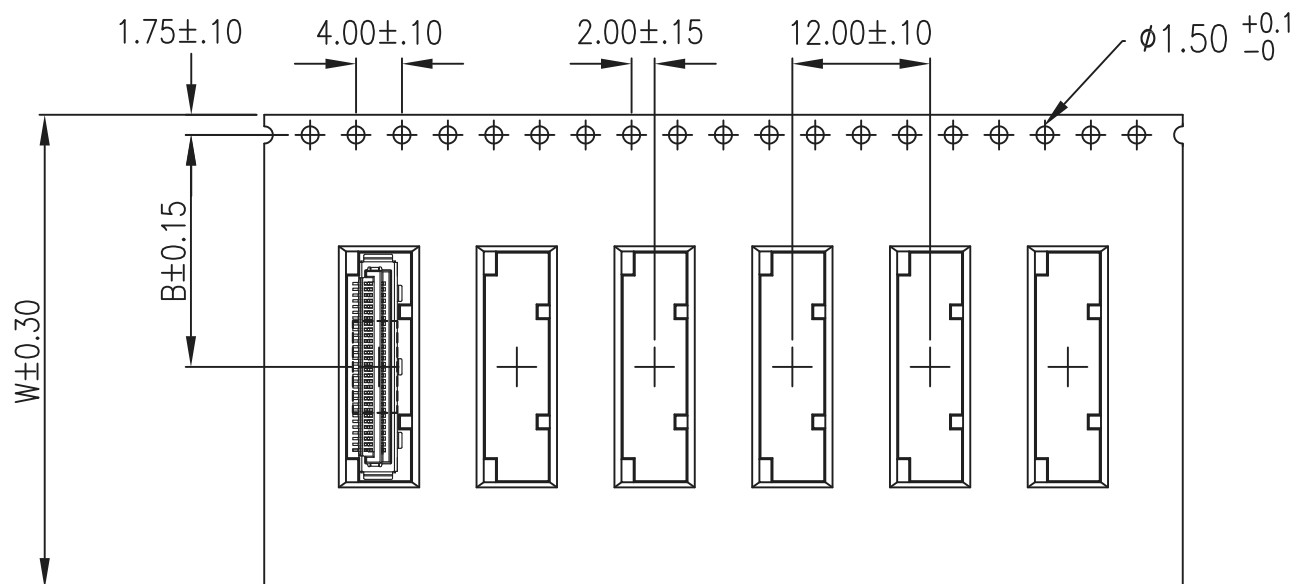

|   |            |
|---|------------|
|   | 20PIN      |
| W | 24.00±0.30 |
| B | 11.50±0.15 |
| C | 14.90±0.10 |
|   |            |

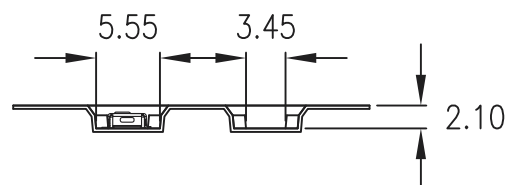

△ PULL OUT DIRECTION →

1. 10 sprocket hole pitch cumulative tolerance  $\pm 0.20$ .
2. Carrier camber is within 1 mm in 250 mm.
3. Material : Black Conductive Polystyrene Alloy.
4. All dimensions meet EIA-481-C requirements.
5. Thickness :  $0.30 \pm 0.05$  mm.
6. Packing length per 22" reel : 74.5 Meters.(1:3)
7. Component load per 13" reel : 2000 pcs.

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X.  $\pm 0.35$

.X  $\pm 0.25$

.XX  $\pm 0.15$

.XXX  $\pm 0.05$

ANG  $\pm 3^\circ$



PPOJECTION

照片框



ORDER INFORMATION

LVC-VXCR-20-LF  
SERIES | | | | LEADFREE  
20WAY  
REEL  
CAP  
NON POST  
180°SMT

DESCRIPTION:

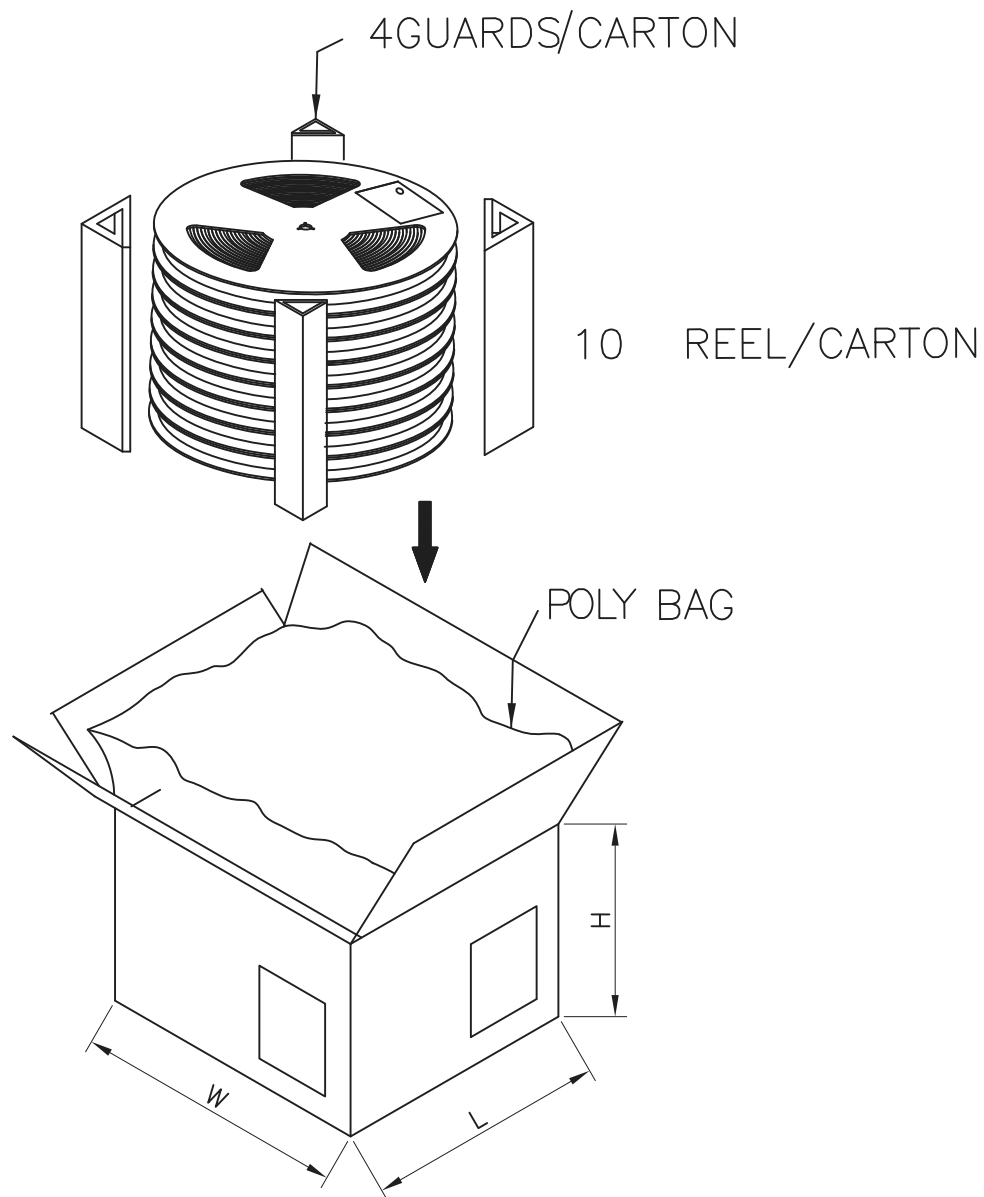

△ PULL OUT DIRECTION



#### PACKING MATERIAL

|            |               |
|------------|---------------|
| PART NAME  | 20PIN DIM(mm) |
| REEL       | 330X24        |
| BIG CARTON | 350X350X340   |

#### PACKING CAPACITY

| PART NO.    | PCS/RE      | RE/BC    | PCS/BC        |
|-------------|-------------|----------|---------------|
| LVC-VXCR-20 | 2,000PCS/RE | 10 RE/BC | 20,000 PCS/BC |

#### RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X.  $\pm 0.35$

.X  $\pm 0.25$

.XX  $\pm 0.15$

.XXX  $\pm 0.05$

ANG  $\pm 3^\circ$

PPOJECTION

照片框

#### ORDER INFORMATION

LVC-VXCR-20-LF  
SERIES | | | LEADFREE  
| | | 20WAY  
| | | REEL  
| | | CAP  
| | | NON POST  
| | | 180°SMT

DESCRIPTION: