





02P



03P

技术参数:

额定电流 Rated current	32A (IEC&UL)	防火等级 Flammability	灼热丝 850℃ 或 UL94V-2
额定电压 Rated voltage	600V ac (UL) 450Vac (IEC)	连接方式 Mounting	无螺纹连接
接触材料 (端子) Contact material	铜+不锈钢	配线规格 Wiring specification	24-12AWG (UL) 0.2-4mm ² (IEC)
绝缘材料 Insulation material	PA66+PC	环境温度范围 Ambient temperature	T85

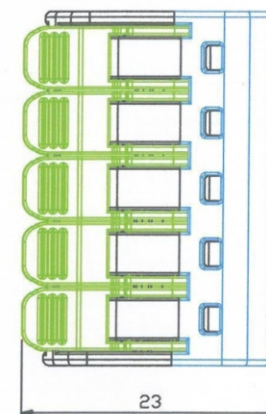

05P

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

ORDER INFORMATION

LWC-W58A-xx-LF
SERIES | | | LEADFREE
| | | 02.03.05 WAY
| | | A TYPE
| | | PITCH 5.8mm
| | | WIRE TO WIRE

DESCRIPTION: