
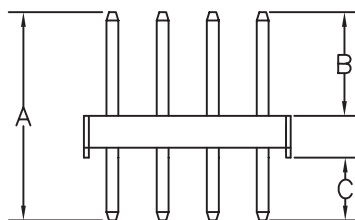


MATERIAL
HOUSING : THERMOPLASTIC UL94V-0
CONTACT : COPPER ALLOYS

SPECIFICATION
CURRENT: 1A
OPERATING TEMPERATURE: -55°C TO +105°C
CONTACT RESISTANCE : 20 MILLIOHMS MAX
INSULATION RESISTANCE : 5000 MEGAOHMS MIN
DIELECTRIC STRENGTH : 1000 VAC MIN

RECOMMENDED P.C.B LAYOUT

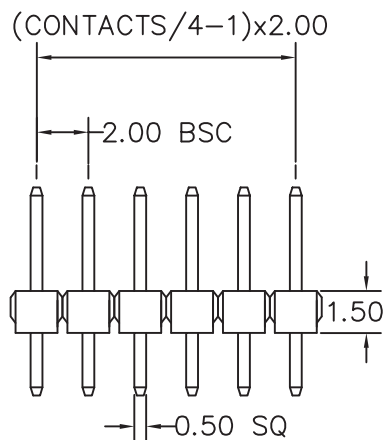

A: 8.20 mm B: 3.90 mm C: 2.80 mm

CONTACTS	4X16
4X2	4X17
4X3	4X18
4X4	4X19
4X5	4X20
4X6	4X21
4X7	4X22
4X8	4X23
4X9	4X24
4X10	4X25
4X11	4X26
4X12	4X27
4X13	4X28
4X14	4X29
4X15	4X30

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm


SCALE 1:1

DATE


SIZE A4

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PJECTION



ORDER INFORMATION

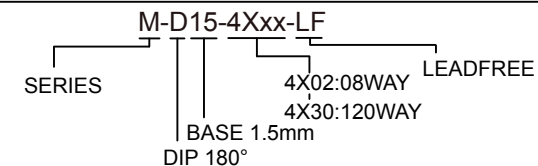

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: