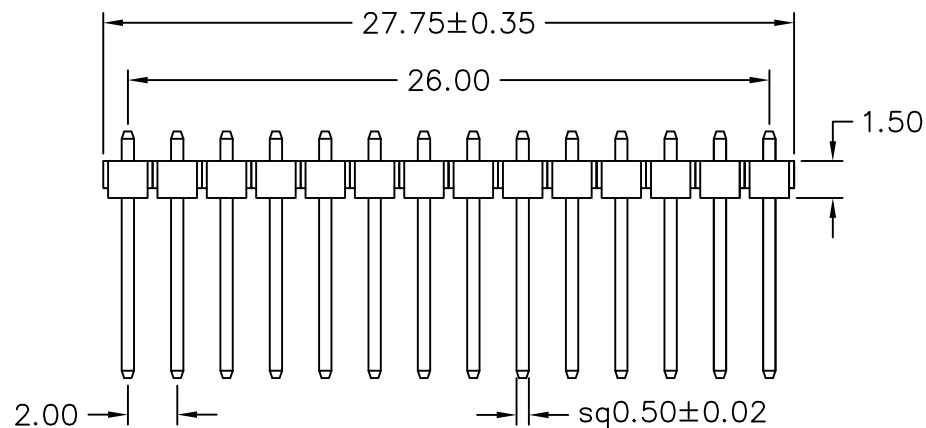
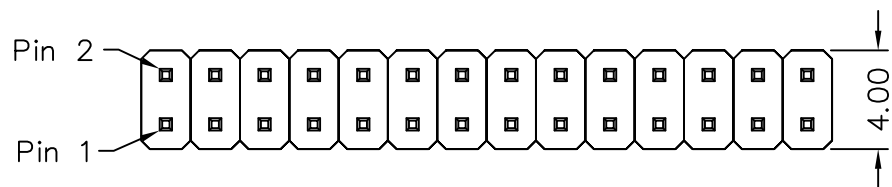


Recommended P.C.B Layout

MATERIAL

Insulator : NY6T
Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

照片框

ORDER INFORMATION

M-D15012073-2X14-LF
SERIES | 28 WAY | LEADFREE
DIP 7.3mm
CONTACT 1.2mm
BASE 1.5mm
DIP180°

DESCRIPTION: PIN HEADER 2.00*2.00mm STRAIGHT TYPE, DUAL ROWS