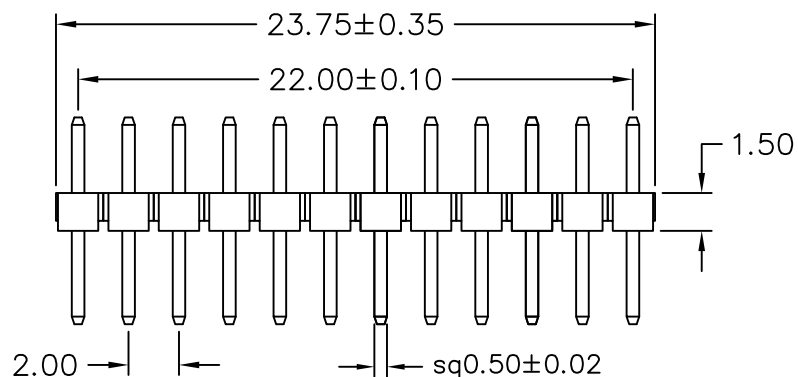
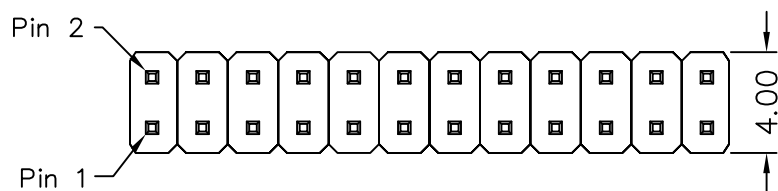


Recommended P.C.B Layout

Tolerance: ±0.03

MATERIAL

Insulator : NY10T UL94-V0

Contact Pin : Brass

SPECIFICATION

Current Rate : 4 AMP PER PIN(26AWG)

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to +105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

照片框

ORDER INFORMATION

M-D15030037-2X12-LF

SERIES

LEADFREE

24 WAY

DIP 3.7mm

CONTACT 3.0mm

BASE 1.5mm

DIP180°

DESCRIPTION: PIN HEADER 2.00*2.00mm STRAIGHT TYPE, DUAL ROWS