



04~20 pin : 0.10mm  
 22~50 pin : 0.20mm  
 52~80 pin : 0.30mm

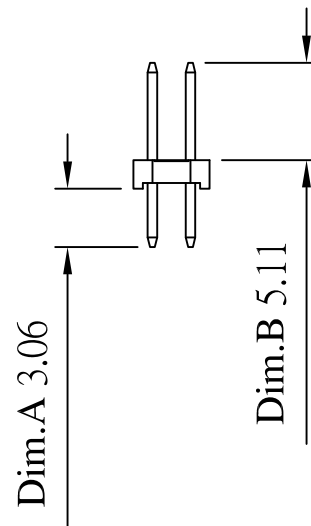

Current Rating and Voltage: 2 Amps 250V AC (r.m.s)  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature: - 40° ~ +105° C  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Copper Alloy  
 Standard: Brass  
 Insulator Material: High Temperature  
 Plastic,UL 94V-0

Recommended P.C. Board  
 Hole Layout

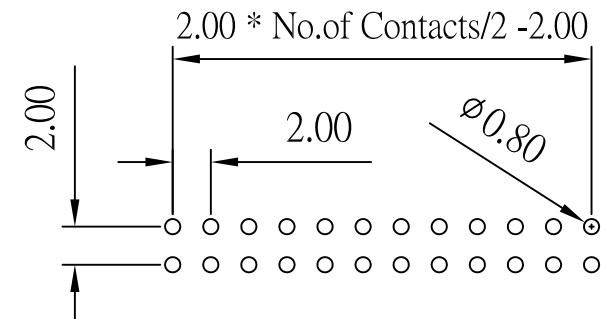

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ±

照片框

ORDER INFORMATION

M-D15051031Sxx-2Xxx-LF  
 SERIES | | | | LEADFREE  
 | | | | 2X02:04WAY  
 | | | | 2X40:80WAY  
 DIP180° | | | | S20:SEMI GOLD 20u"  
 BASE 1.5mm | | | | S30:SEMI GOLD 30u"  
 CONTACT 5.11mm | | | | DIP 3.06mm

煜倫股份有限公司

www.morethanall.com

SIZE A4

PJECTION

DESCRIPTION: