
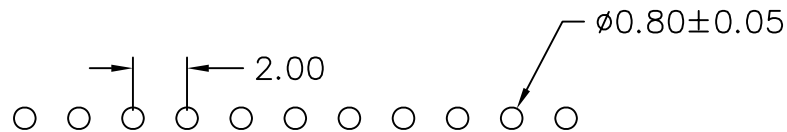

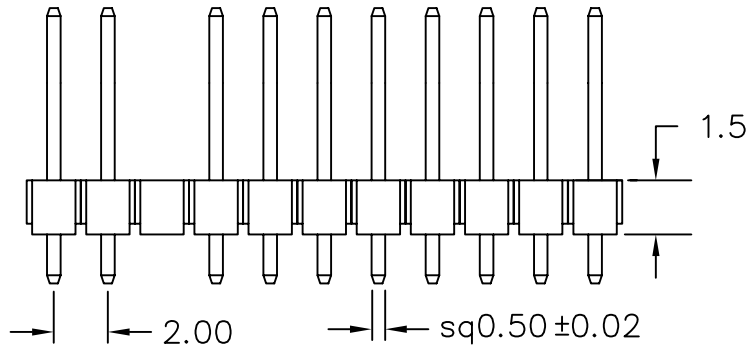


1 2 3 4 5 6 7 8 9 0

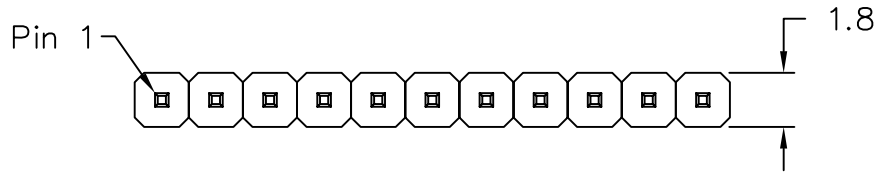

Recommended P.C.B Layout

MATERIAL

Insulator : NY6T
Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute
Operation Temperature : -40°C to + 105°C

M-D1512630-1X11E3-LF

LEADFREE

RoHS Compliant



PART NO. M-D1512630-1X11E3

DWG NO. M-D1512630-1X11E3

FILE NO.

APPROVED BY CY

DRAWING BY

TOLERANCES ARE

.X ± 0.3
.XX ± 0.2
.XXX
AWG


DESCRIPTION: 2.0mm PIN HEADER STRAIGHT TYPE, SINGLE ROW

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE