

P.C.B. LAYOUT


Specifications:

Current rating:1 Amps  
 Dielectric Withstanding:AC 500V  
 Operating Temperature:-40°C ~ +105°C  
 Contact resistance:20mohm max.  
 Insulation resistance:5,000Mohm min.

Materials:

Insulator:Polyester(UL94V-0)  
 Contact material:Brass  
 Plating:Gold flash

M-D153928-1Xxx-LF

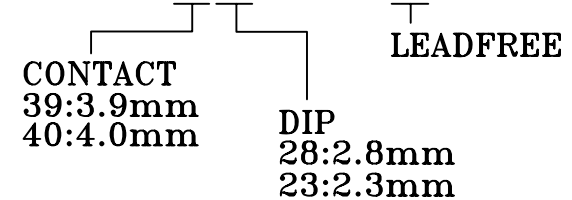

RoHS Compliant



PART NO. M-D153928-1Xxx

DWG NO. M-D153928-1Xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE  
 .X ±0.2  
 .XX ±0.15  
 .XXX ±  
 AWG

DESCRIPTION:  
 AREA

2.0MM PIN HEADER  
 SINGLE ROW STRAIGHT TYPE

REVISIONS	HK	DATE
-----------	----	------

煜倫股份有限公司