
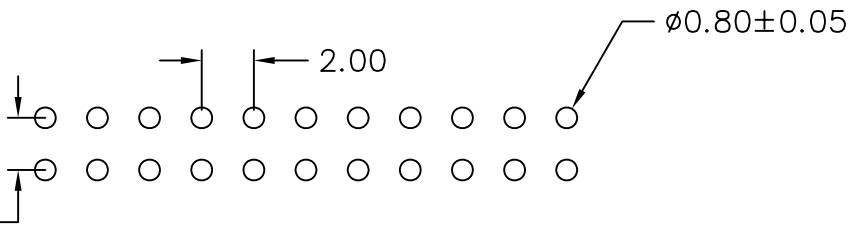
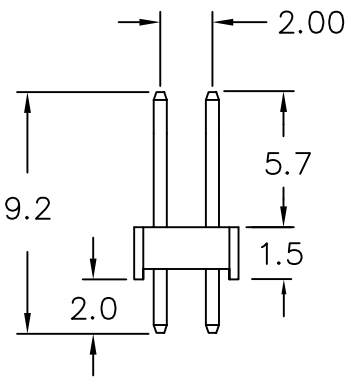
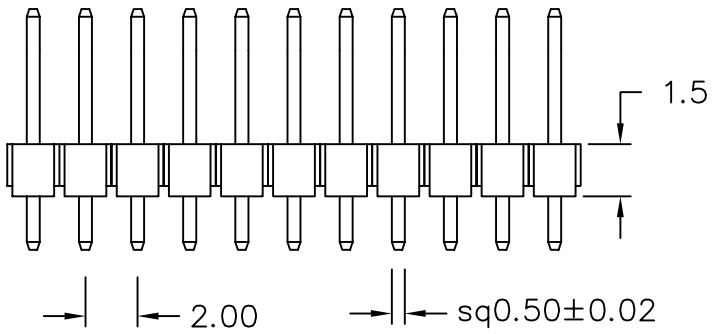


1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A

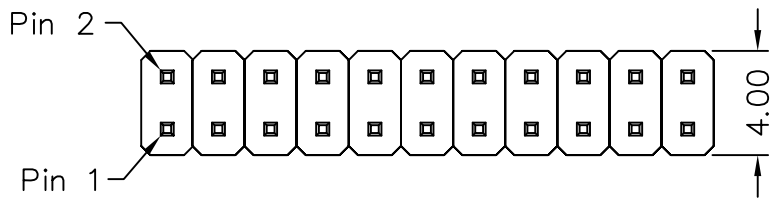

Recommended P.C.B Layout

MATERIAL

Insulator : NY6T
Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute
Operation Temperature : -40°C to + 105°C

M-D155720-2X11-LF
LEADFREE

RoHS Compliant



PART NO. M-D155720-2X11

DWG NO. M-D155720-2X11

FILE NO.

APPROVED BY CY

DRAWING BY

TOLERANCES ARE
.0 =±.30
.00 =±.20
.000 =±.XXX
.0000=±.
ANG.=±3'

DESCRIPTION:
AREA

PIN HEADER 2.00*2.00mm
STRAIGHT TYPE, DUAL ROWS
REVISIONS
HK
DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION