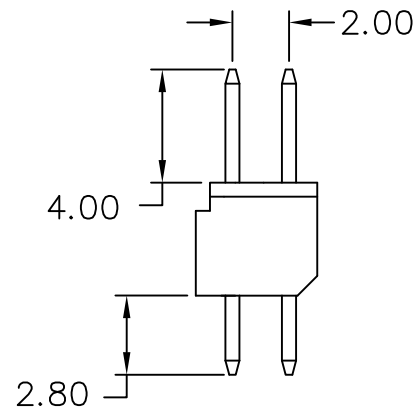
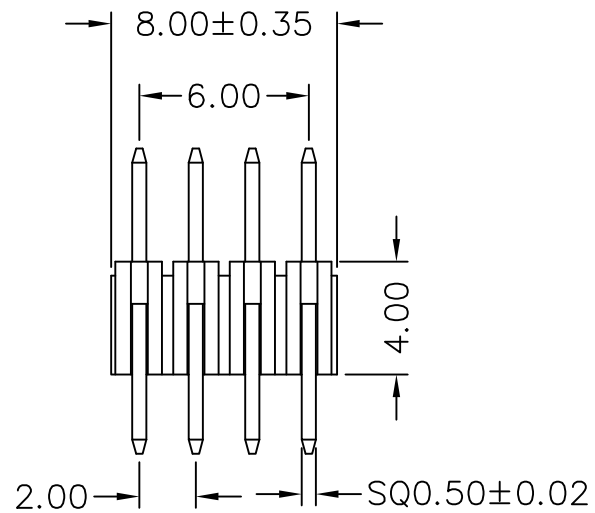
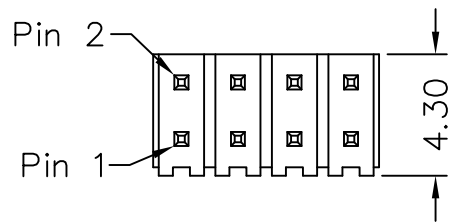


Recommended P.C.B Layout

MATERIAL

Insulation: Nylon6T UL 94V-0

Contact Pin : Brass

SPECIFICATION

Current Rate : 2 AMP

Insulation Resistance : 1000MΩ Min

Contact Resistance : 20mΩ Max

Dielectric Voltage : 500V AC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

照片框

ORDER INFORMATION

M-DT4-2X04-LF
SERIES
LEADFREE
08WAY
BASE 4.0mm
TIN
DIP 180°

DESCRIPTION: PIN HEADER 2.00*2.00mm STRAIGHT TYPE, DUAL ROWS HEIGHT 4.0mm