

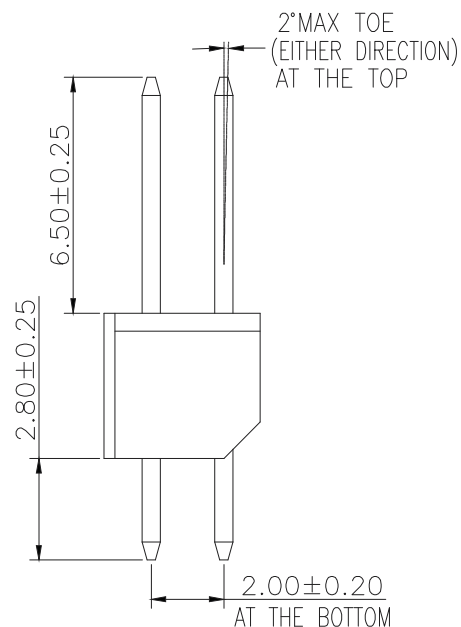
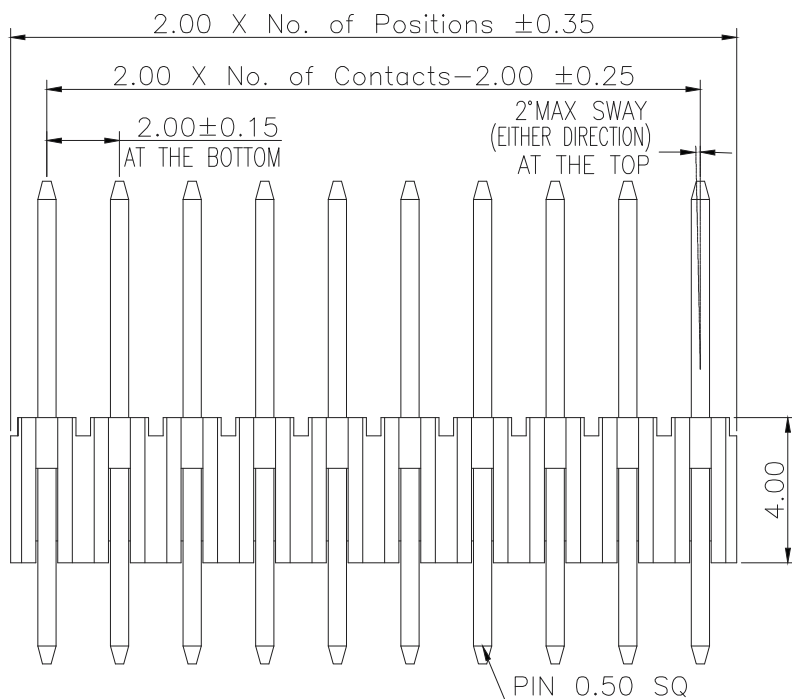


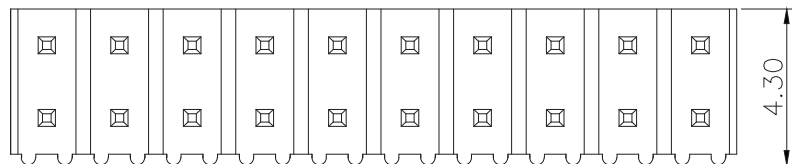

Specifications
 Current Rating: 2.0Amp
 Insulation Resistance: 1000MΩMin.
 Dielectric Withstanding Voltage: 500VAC
 Contact Resistance: 20mΩMax.
 Operating Temperature: -40°C to +105°C
 Materials
 Contact Material: Brass
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon (Halogen Free) or the equivalent material

Recommended P.C.Board
 Layout
 (Tolerance: ±0.05)

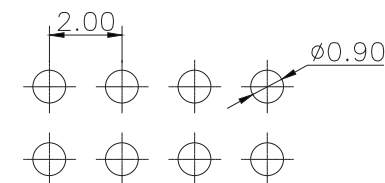

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30
 .X ± 0.25
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

M-DT4065-2Xxx-LF
 SERIES LEADFREE
 2X02:04WAY
 2X40:80WAY
 CONTACT 6.5mm
 BASE 4.0mm
 DIP 180°
 TIN

DESCRIPTION: 2.00 PIN HEADER DUAL ROWS DIP TYPE BASE 4.00H