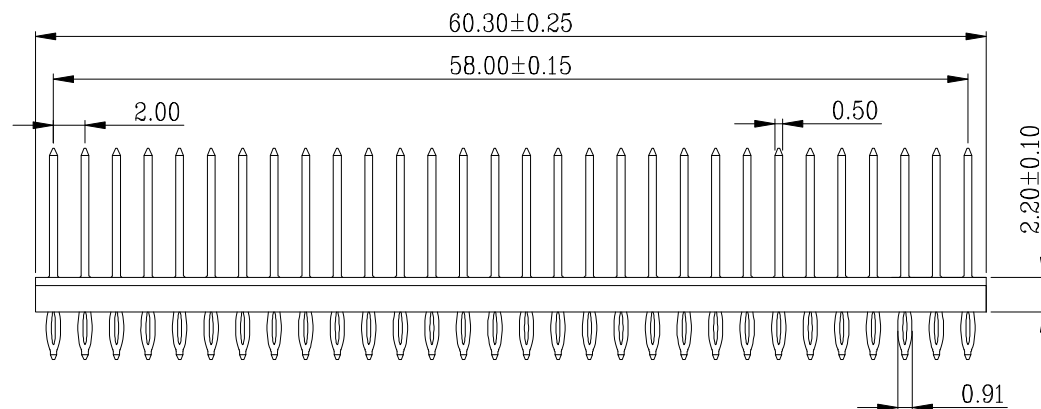
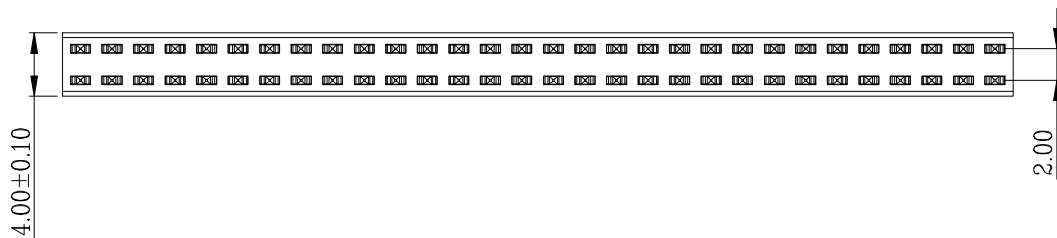


Pin-Header-Press-fit Double Row

2.00mm pitch

Technical data :

Insulator body:

PA6T+30%GF UL 94V-0

color:Black

Contact material:

Phosphor bronze

plating:

Selective gold plated

Current Rating :

1Amp

insulator resistance :

500 Megohms Min

Dielectric withstanding :

AC 500V for 1 minute


operating Temp range:

-40°C to +105°C

Max. processing Temp :

230°C for 30-60 seconds.

260°C for 10 seconds.

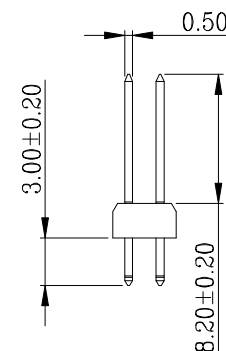

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.05

ANG ±

照片框

ORDER INFORMATION

M-P1348230-2X30-LF

SERIES
LEADFREE
60 WAY
DIP 3.0mm
CONTACT 8.2mm
TOTAL 13.4mm
PRESS FIT

DESCRIPTION: