

**MATERIAL**

Contact Pin : Brass




**SPECIFICATION**

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

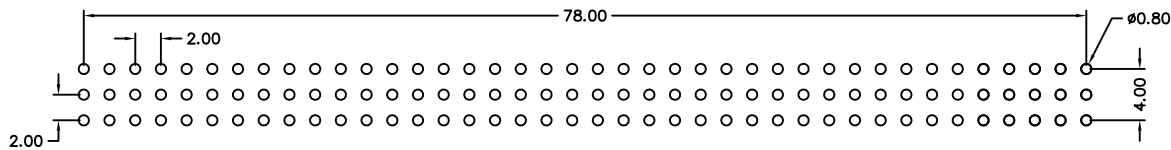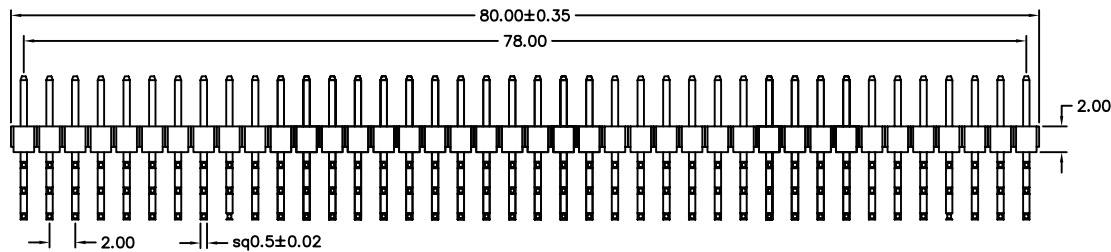

Recommended P.C.B Layout

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

照片框

**ORDER INFORMATION**

M-R-3X40-LF  
SERIES | LEADFREE  
120 WAY  
DIP 90°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: PIN HEADER 2.00\*2.00mm RIGHT ANGLE TYPE, TRIPLE ROWS