
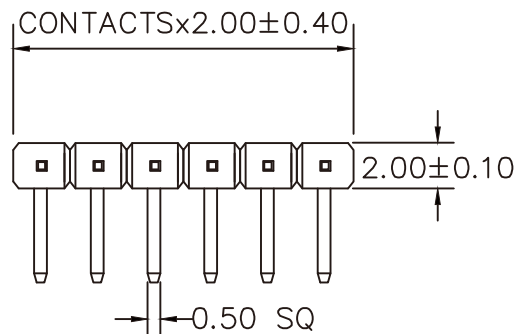
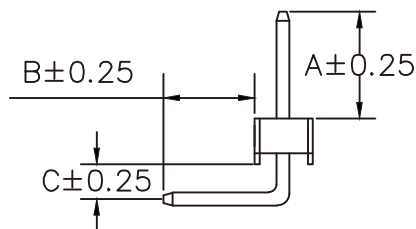


RECOMMENDED P.C.B LAYOUT

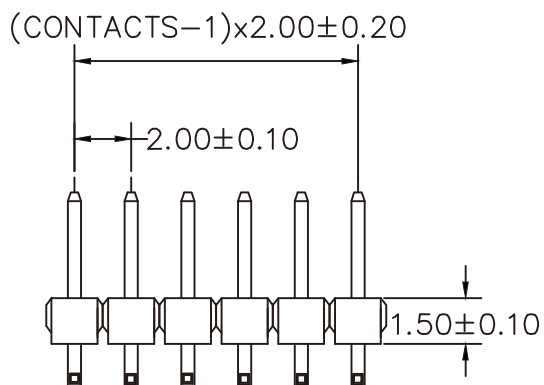

A: 3.20 mm B: 3.00 mm C: 1.30 mm

## MATERIAL

HOUSING : THERMOPLASTIC UL94V-0

CONTACT : COPPER ALLOYS

## SPECIFICATION

CURRENT: 1A

OPERATING TEMPERATURE: -55 $^{\circ}$ C TO +105 $^{\circ}$ C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 5000 MEGAOHMS MIN

DIELECTRIC STRENGTH : 1000 VAC MIN

| CONTACTS | 1X21 |
|----------|------|
| 1X2      | 1X22 |
| 1X3      | 1X23 |
| 1X4      | 1X24 |
| 1X5      | 1X25 |
| 1X6      | 1X26 |
| 1X7      | 1X27 |
| 1X8      | 1X28 |
| 1X9      | 1X29 |
| 1X10     | 1X30 |
| 1X11     | 1X31 |
| 1X12     | 1X32 |
| 1X13     | 1X33 |
| 1X14     | 1X34 |
| 1X15     | 1X35 |
| 1X16     | 1X36 |
| 1X17     | 1X37 |
| 1X18     | 1X38 |
| 1X19     | 1X39 |
| 1X20     | 1X40 |

## RoHS Compliant

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4


TOLERANCES ARE

X.  $\pm$   
.X  $\pm$  0.38  
.XX  $\pm$  0.25  
.XXX  $\pm$   
ANG  $\pm$  5 $^{\circ}$

PPOJECTION

照片框

## ORDER INFORMATION

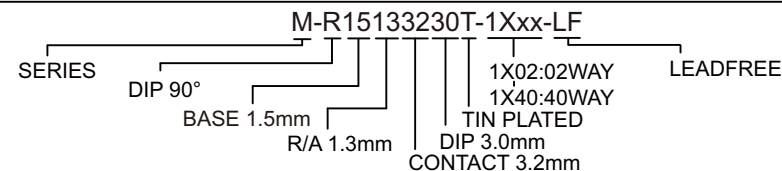

DESCRIPTION: