
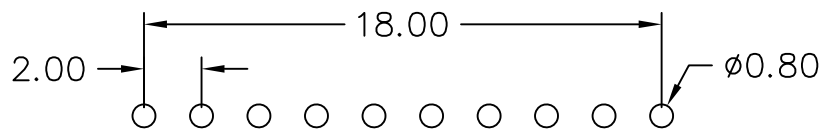
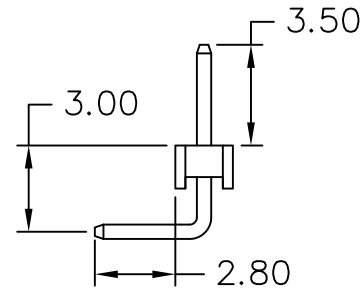


**MATERIAL**

Insulator: NY10T UL94-V0  
 Contact Pin : Brass

**SPECIFICATION**

Current Rate : 1 AMP  
 Insulation Resistance : 5000MΩMin. at DC 500V  
 Contact Resistance : 20mΩMax. at DC 100mA  
 Dielectric Voltage : AC 500V for one minute  
 Operation Temperature : -40°C to + 105°C

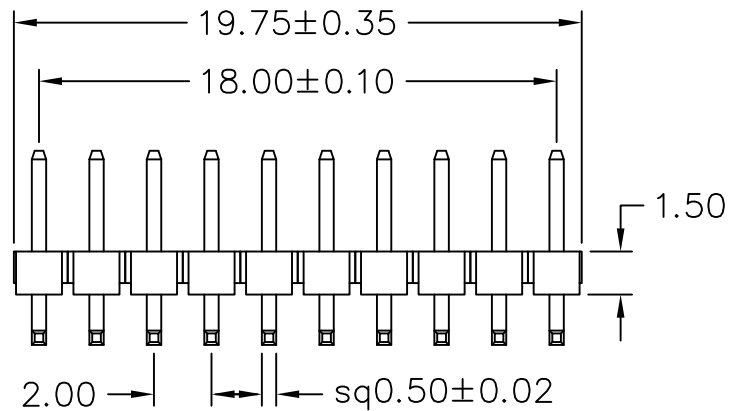

Recommended P.C.B Layout

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
 .X ± 0.30  
 .XX ± 0.20  
 .XXX ±  
 ANG ± 3°

照片框

**ORDER INFORMATION**

M-R15153528-1X10-LF  
 SERIES | | | | | | | | | | LEADFREE  
 DIP 90° | | | | | | | | | | 10 WAY  
 | | | | | | | | | | CONTACT 3.5mm  
 | | | | | | | | | | R/A 1.5mm  
 | | | | | | | | | | BASE 1.5mm

DESCRIPTION: PIN HEADER 2.00\*2.00mm RIGHT ANGLE TYPE, SINGLE ROW