
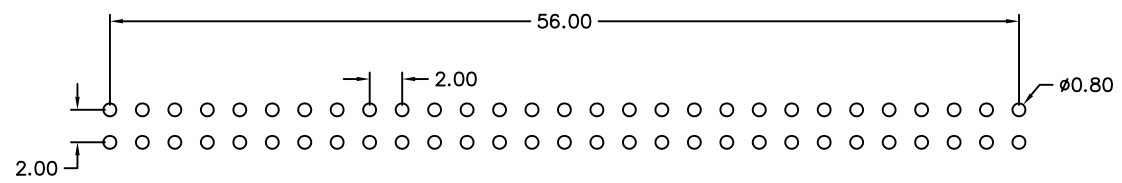
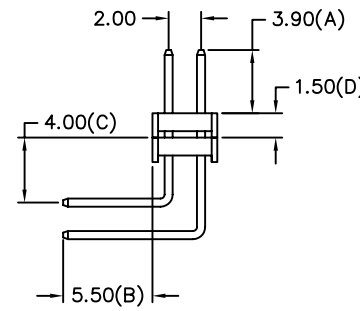


MATERIAL
 Contact Pin : Brass
 Insulator : NYLON 6T

SPECIFICATION
 Current Rate : 1 AMP
 Insulation Resistance : 5000MΩMin. at DC 500V
 Contact Resistance : 20mΩMax. at DC 100mA
 Dielectric Voltage : AC 500V for one minute

M-R30253955-2X29-LF
LEADFREE
 RoHS Compliant

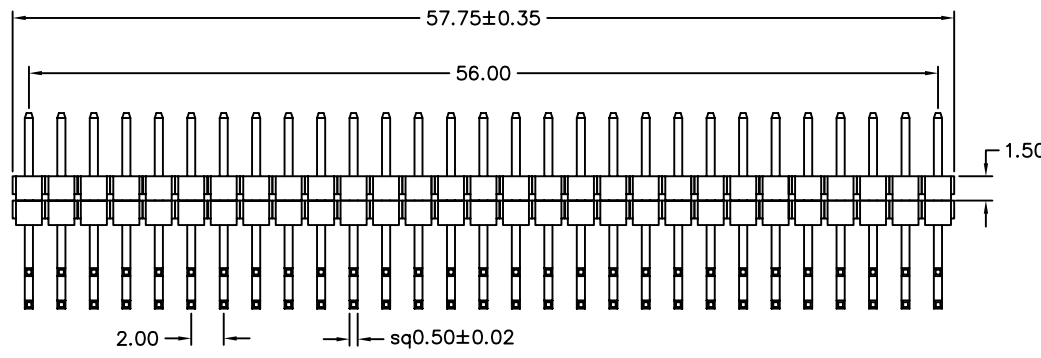

Recommended P.C.B Layout

	PART NO. M-R30253955-2X29		TOLERANCES ARE .X ± .XX ± .XXX ± AWG	DESCRIP TION: PIN HEADER 2.00*2.00mm RIGHT ANGLE TYPE, DUAL ROWS DUAL INSULATORS	AREA	REVISIONS	HK	DATE
	DWG NO. M-R30253955-2X29							
	FILE NO.		DRAWING BY					
	UNIT / mm	SCALE 1:1	PROJECTION					