





1 2 3 4 5 6 7 8 9 0

J  
I  
H  
G  
F  
E  
D  
C  
B  
A

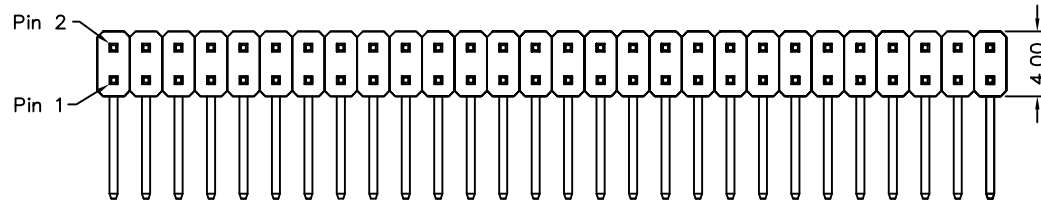

**MATERIAL**  
 Contact Pin : Brass  
 Insulator : NYLON 6T

**SPECIFICATION**  
 Current Rate : 1 AMP  
 Insulation Resistance : 5000MΩMin. at DC 500V  
 Contact Resistance : 20mΩMax. at DC 100mA  
 Dielectric Voltage : AC 500V for one minute

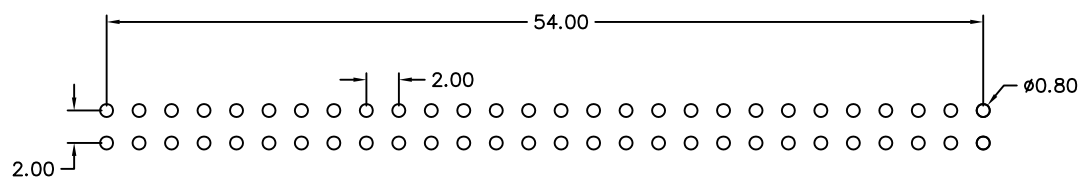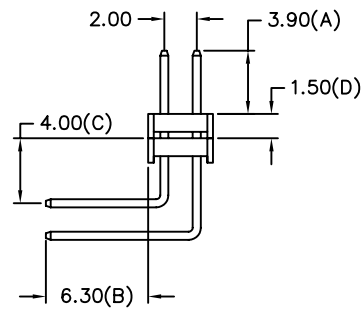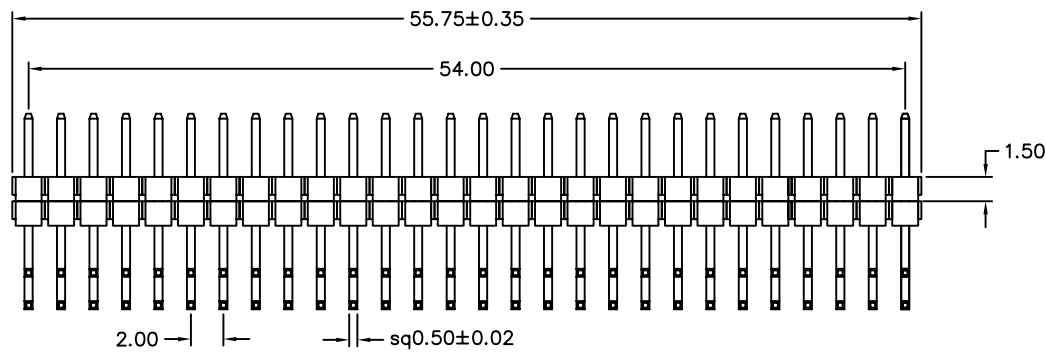

Recommended P.C.B Layout

M-R30253963-2X28-LF  
 LEADFREE  
 RoHS Compliant



|                           |           |               |  |  |      |           |    |      |
|---------------------------|-----------|---------------|--|--|------|-----------|----|------|
| PART NO. M-R30253963-2X28 |           | CHECKED BY CY | TOLERANCES ARE<br>.X ±<br>.XX ±<br>.XXX ±<br>AWG | DESCRIP TION: PIN HEADER 2.00*2.00mm<br>RIGHT ANGLE TYPE, DUAL ROWS<br>DUAL INSULATORS | AREA | REVISIONS | HK | DATE |
| DWG NO. M-R30253963-2X28  |           |               |  |  |      |           |    |      |
| FILE NO.                  |           | DRAWING BY    | PROJECTION                                       |  |      |           |    |      |
| UNIT / mm                 | SCALE 1:1 |               |  |  |      |           |    |      |

煜倫股份有限公司