


P. C. B . LAYOUT



- A: 4.00 mm
- B: 6.00 mm
- C: 2.50 mm
- D: 3.00 mm

MATERIAL

HOUSING : NY6T, UL-94V0
 CONTACT : COPPER ALLOYS
 PLATED : GOLD FLASH
 COLOR : BLACK

SPECIFICATION

CURRENT : 2A
 OPERATING TEMPERAURE : -55° C TO +105° C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE: 1000 MEGAOHMS MIN
 WITHSTAND VOLTAGE : 500 V AC/minute

CONTACTS			
	2 × 11	2 × 21	2 × 31
2 × 02	2 × 12	2 × 22	2 × 32
2 × 03	2 × 13	2 × 23	2 × 33
2 × 04	2 × 14	2 × 24	2 × 34
2 × 05	2 × 15	2 × 25	2 × 35
2 × 06	2 × 16	2 × 26	2 × 36
2 × 07	2 × 17	2 × 27	2 × 37
2 × 08	2 × 18	2 × 28	2 × 38
2 × 09	2 × 19	2 × 29	2 × 39
2 × 10	2 × 20	2 × 30	2 × 40

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1


DATE

SIZE A4 PPROJECTION

X. ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ±
 ANG ± 5°

照片框

ORDER INFORMATION

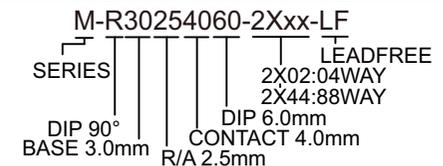

DESCRIPTION: PH2.00 雙塑90° H:1.50 2*XXPIN