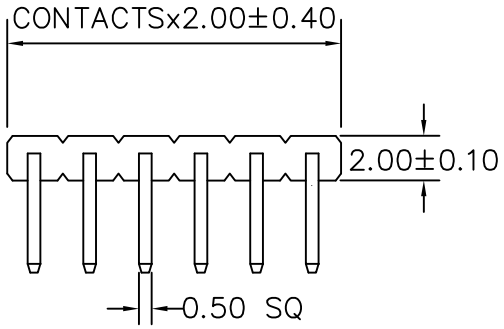



RECOMMENDED P.C.B LAYOUT

CONTACTS	1X21
1X2	1X22
1X3	1X23
1X4	1X24
1X5	1X25
1X6	1X26
1X7	1X27
1X8	1X28
1X9	1X29
1X10	1X30
1X11	1X31
1X12	1X32
1X13	1X33
1X14	1X34
1X15	1X35
1X16	1X36
1X17	1X37
1X18	1X38
1X19	1X39
1X20	1X40

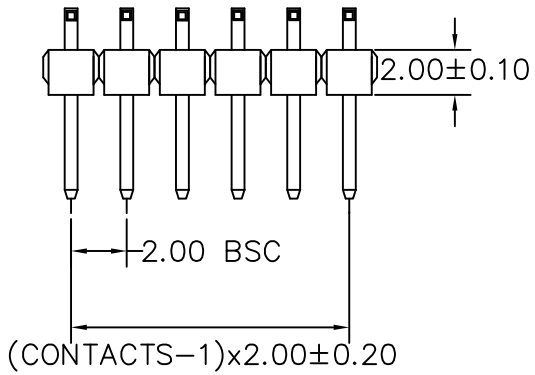

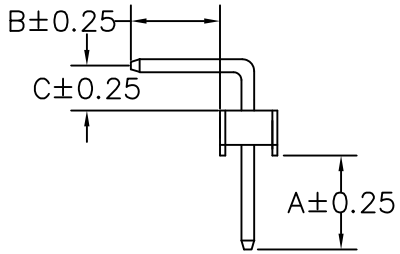

A: 4.50 mm B: 3.00 mm C: 1.00 mm

MATERIAL
HOUSING : NYLON-6T,UL94V-0
CONTACT : COPPER ALLOYS
PLATED : GOLD-FLASH
COLOR : BLACK

SPECIFICATION
CURRENT : 1A
OPERATING TEMPERATURE : -55˚C TO +105˚C
CONTACT RESISTANCE : 20 MILLIOHMS MAX
INSULATION RESISTANCE : 1000 MEGAOHMS MIN
WITHSTANDING VOLTAFE : 500V AC MIN

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ± 5°

照片框

ORDER INFORMATION

M-RH20103045-1Xxx-LF

SERIES
DIP 90°
HIGH
BASE 2.0mm
DIP 4.5mm
CONTACT 3.0mm
R/A 1.0mm
1X02:02WAY
1X40:40WAY
LEADFREE

DESCRIPTION: PIN HEADER 2.00 90° H:2.00