

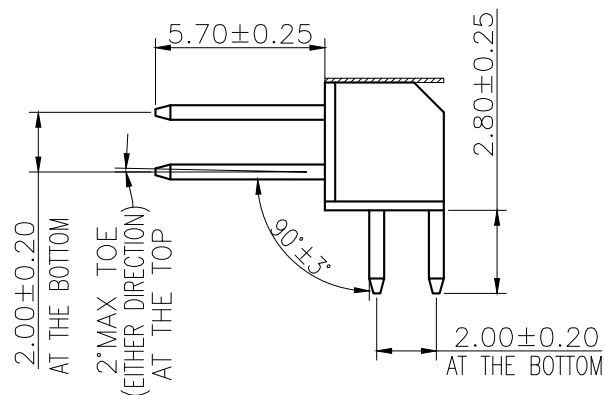
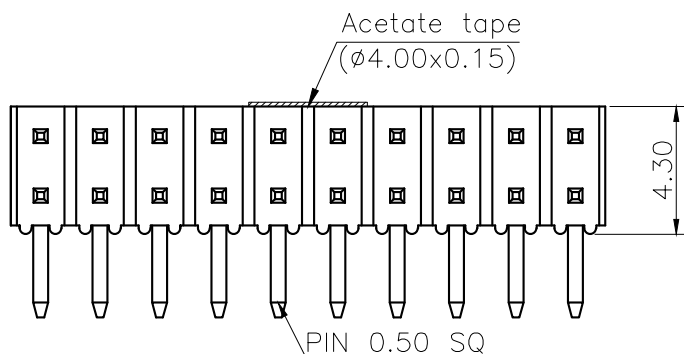


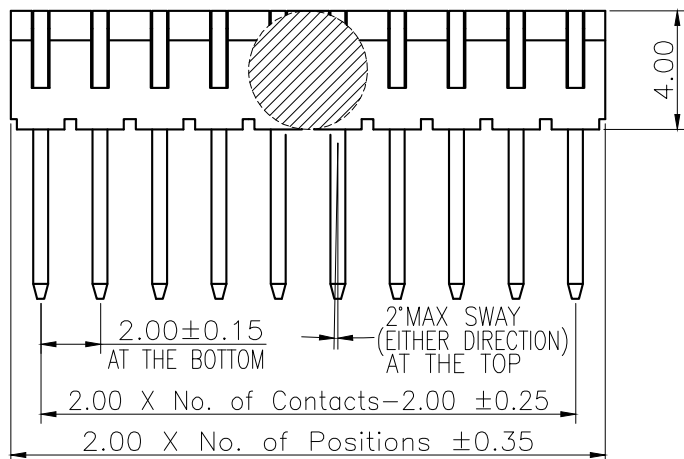

Specifications
 Current Rating:2.0Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:500VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Brass
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 Nylon (Halogen Free) or the equivalent material

Recommended P.C.Board Layout
 (Tolerance:±0.05)

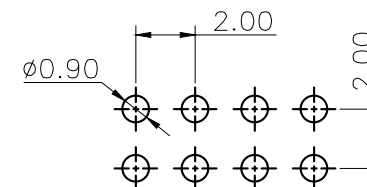

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±


PPOJECTION

照片框

ORDER INFORMATION

M-RT4057CR-2Xxx-LF
 SERIES LEADFREE
 2X02:04WAY
 2X40:80WAY
 DIP 90°
 THICK 4.0mm
 REEL
 MYLAR
 CONTACT 5.70mm

DESCRIPTION: 2.00 PIN HEADER DUAL ROWS R/A TYPE CONNECTOR

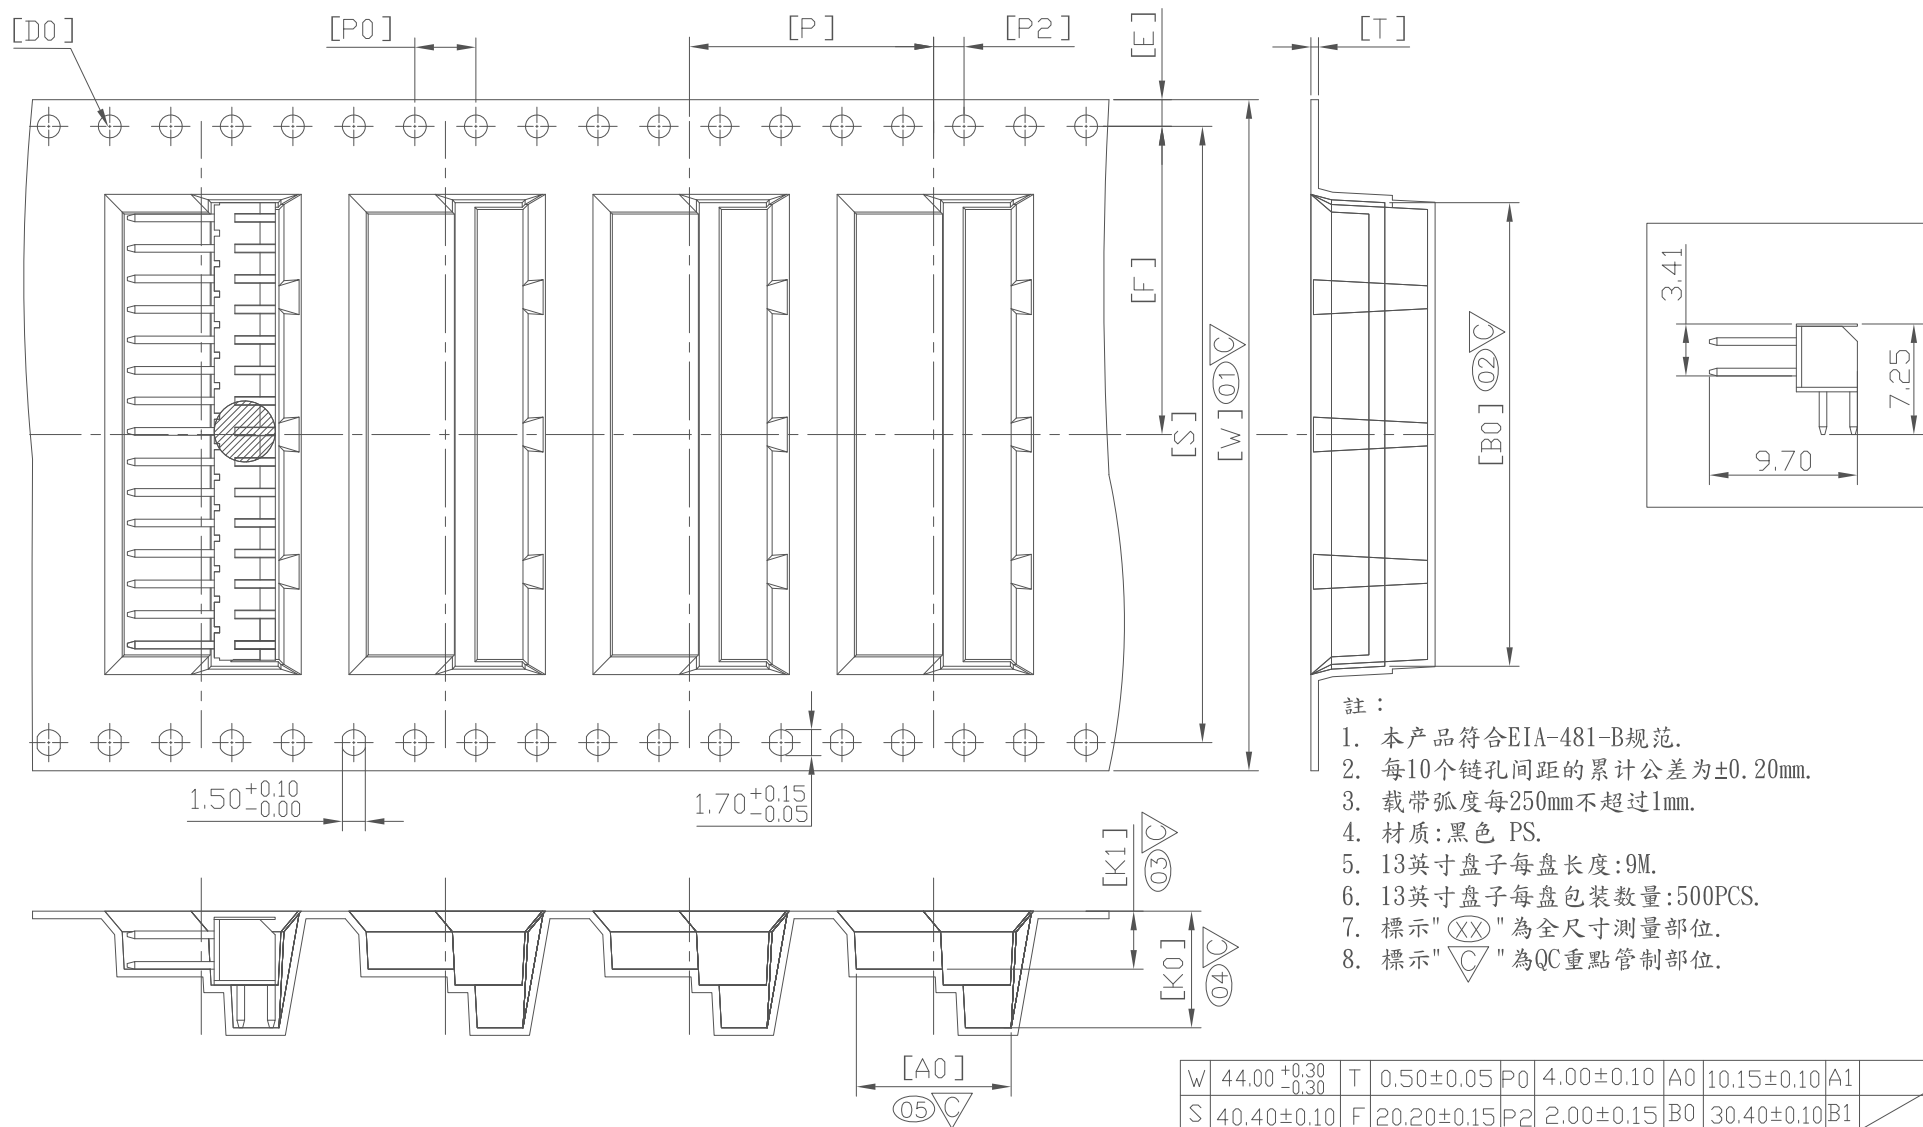

註:

1. 本产品符合EIA-481-B规范.
2. 每10个链孔间距的累计公差为 $\pm 0.20\text{mm}$.
3. 载带弧度每250mm不超过1mm.
4. 材质:黑色 PS.
5. 13英寸盘子每盘长度:9M.
6. 13英寸盘子每盘包装数量:500PCS.
7. 標示"XX"為全尺寸測量部位.
8. 標示" ∇ "為QC重點管制部位.

W	44.00 ^{+0.30} _{-0.30}	T	0.50 $\pm$ 0.05	P0	4.00 $\pm$ 0.10	A0	10.15 $\pm$ 0.10	A1	
S	40.40 $\pm$ 0.10	F	20.20 $\pm$ 0.15	P2	2.00 $\pm$ 0.15	B0	30.40 $\pm$ 0.10	B1	
E	1.75 $\pm$ 0.10	P	16.00 $\pm$ 0.10	D0	$\phi 1.50 \pm 0.10$	K0	7.65 $\pm$ 0.10	K1	3.81 $\pm$ 0.10

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. $\pm$ 0.30
.X. $\pm$ 0.25
.XX $\pm$ 0.15
.XXX $\pm$ 0.10
ANG $\pm$




PPOJECTION

照片框

ORDER INFORMATION

M-RT4057CR-2Xxx-LF
SERIES
DIP 90°
THICK 4.0mm
LEADFREE
2X02:04WAY
2X40:80WAY
REEL
MYLAR
CONTACT 5.70mm

DESCRIPTION: 載帶

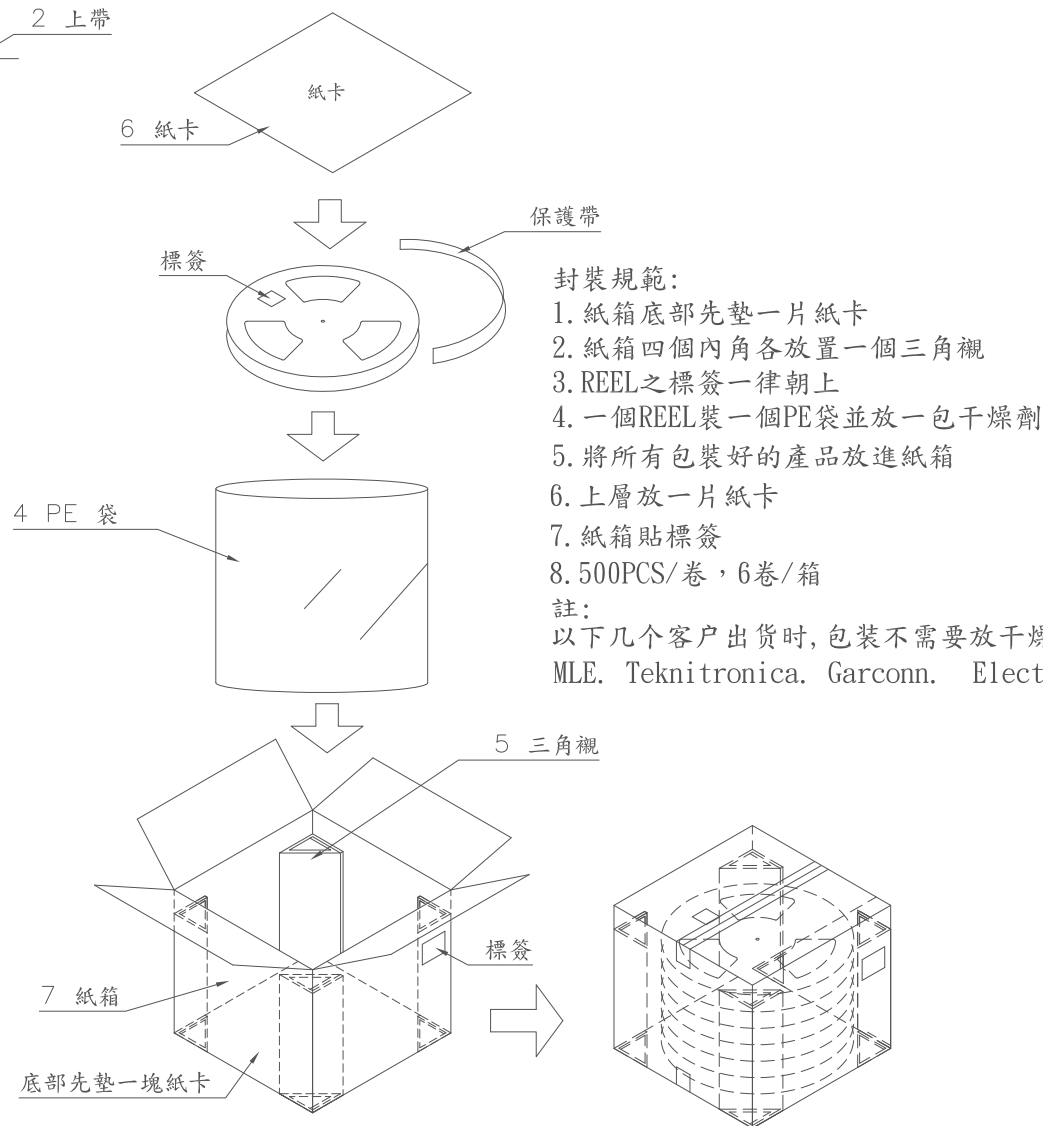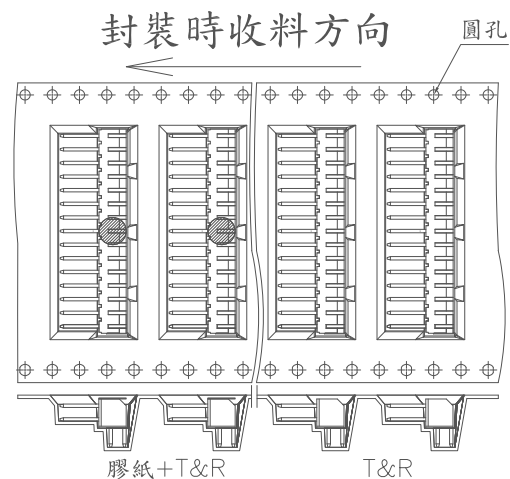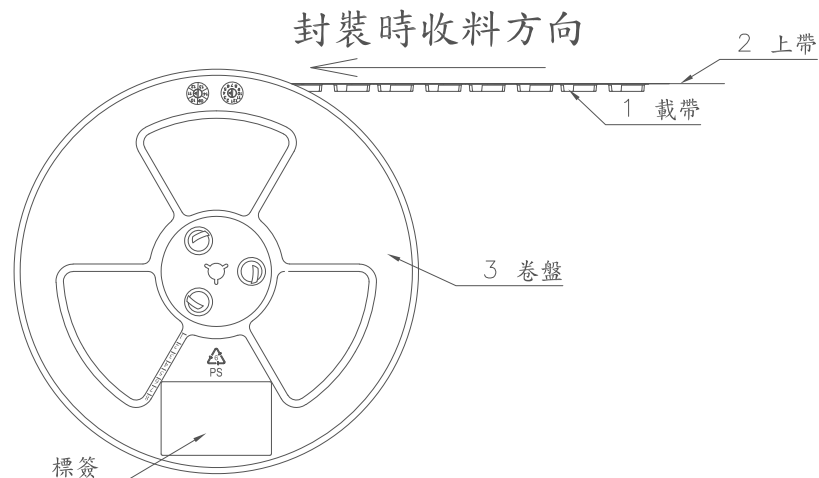

封裝規範:

1. 紙箱底部先墊一片紙卡
2. 紙箱四個內角各放置一個三角襯
3. REEL之標籤一律朝上
4. 一個REEL裝一個PE袋並放一包干燥劑
5. 將所有包裝好的产品放進紙箱
6. 上層放一片紙卡
7. 紙箱貼標籤
8. 500PCS/卷, 6卷/箱

註:

以下几个客户出货时, 包裝不需要放干燥剂的:
MLE. Teknitronica. Garconn. Electronic

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG $\pm$

PPOJECTION

ORDER INFORMATION

M-RT4057CR-2Xxx-LF
SERIES
DIP 90°
THICK 4.0mm
LEADFREE
2X02:04WAY
2X40:80WAY
REEL
MYLAR
CONTACT 5.70mm

DESCRIPTION: 卷裝包裝規範