

MATERIAL

Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP




Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

Green Product High Temp (NYLON 6T or 9T)

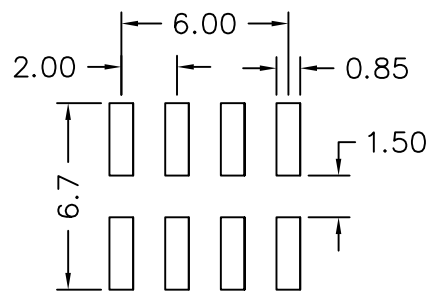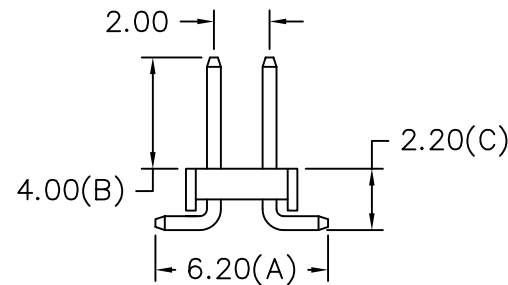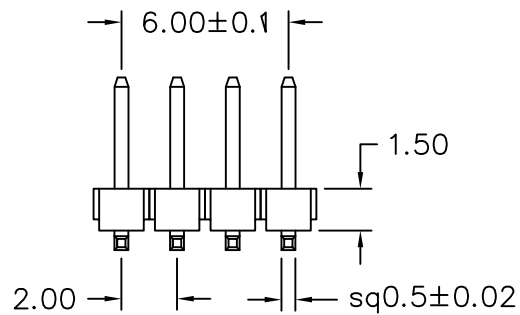

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±

DATE

.XXX±

ANG±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

M-V22X-2X04-LF
SERIES | 08 WAY | LEADFREE
NON POST
HIGH 2.2mm
180°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: PIN HEADER 2.00*2.00mm SMT S/T TYPE, DUAL ROWS