

Dim.D	NOTE
4.00	02PIN
5.00	03~08PINS
8.16	09~40PINS

Specifications

Current Rating:2Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:500VAC

Contact Resistance:20mΩMax.



Operating Temperature:−40°C to +105°C

Materials


Contact Material: Brass

Insulator Material:High Temperature

Thermoplastic, UL 94V-0 Nylon 6T or
the equivalent material

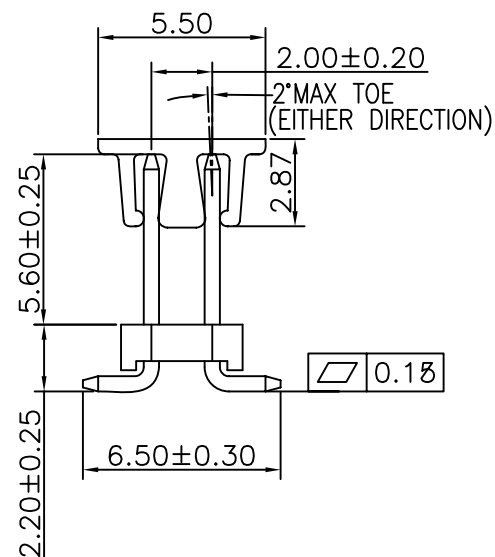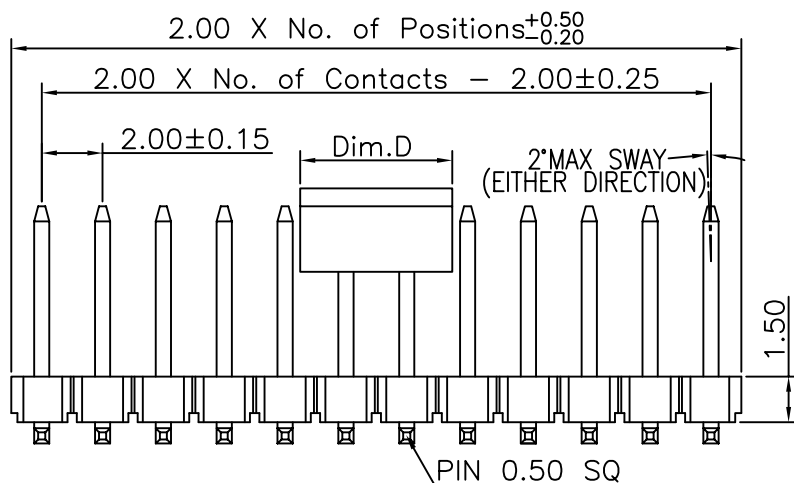

Recommended P.C.Board
Layout
(Tolerance:±0.05)

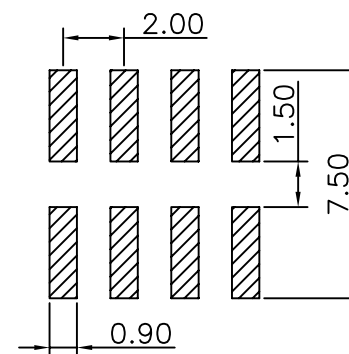

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

M-V22X56C-2Xxx-LF
SERIES LEADFREE
2X02:04WAY
2X40:80WAY
180°SMT HIGH 2.2mm CAP CONTACT 5.6mm NON POST

DESCRIPTION: 2.00 PIN HEADER DUAL ROWS SMT TYPE BASE 1.50H