
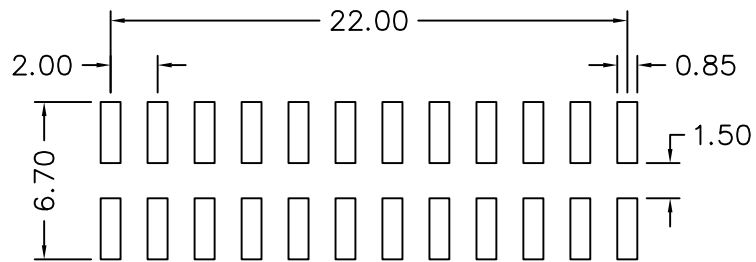
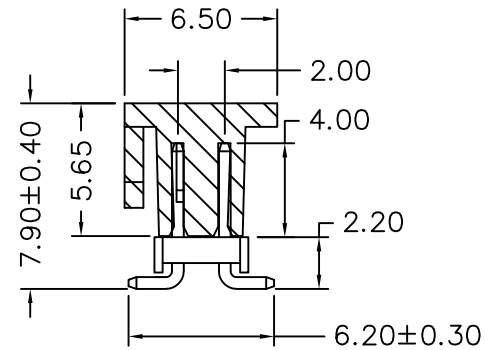


**MATERIAL**

Insulator: NY6T UL94-V0  
Contact Pin : Brass

**SPECIFICATION**

Current Rate : 1 AMP  
Insulation Resistance : 5000MΩMin. at DC 500V  
Contact Resistance : 20mΩMax. at DC 100mA  
Dielectric Voltage : AC 500V for one minute  
Operation Temperature : -40°C to + 105°C

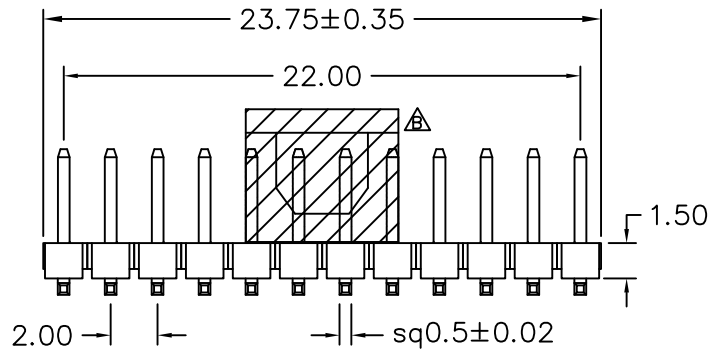

Recommended P.C.B Layout

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±0.30

UNIT / mm

SCALE 1:1

.XX±0.20

DATE

.XXX±

ANG ±3°

**煜倫股份有限公司**

www.morethanall.com

SIZE A4

PPOJECTION

照片框

**ORDER INFORMATION**

M-V22XC-2X12-LF  
SERIES | CAP | 24 WAY | LEADFREE  
NON POST  
HIGH 2.2mm  
180° SMT

DESCRIPTION: PIN HEADER 2.00\*2.00mm SMT S/T TYPE, DUAL ROWS CAP+TUBE