

Specifications

Current Rating: 3Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 600VAC



Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to $+105^{\circ}\text{C}$


Materials

Contact Material: Copper alloy

Insulator Material: Polyester, UL94V-0
NYLON-6T

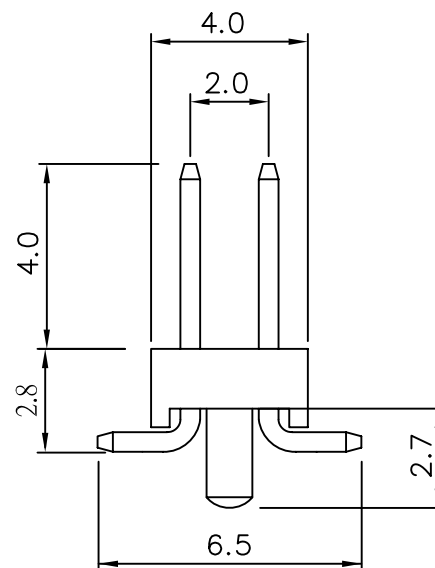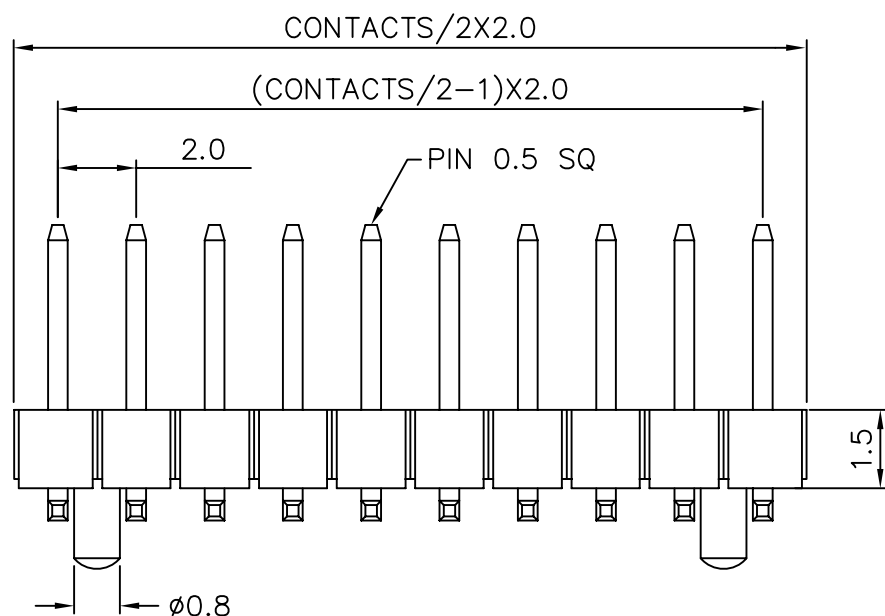

Recommended P.C.Board
Layout

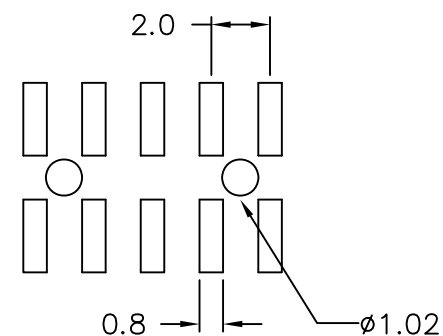

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE _____

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±

照片框

ORDER INFORMATION

M-V28P-2Xxx-LF

SERIES

2X02:02 WAY

2X40:80 WAY

POST

HIGH 2.8mm

180°SMT

LEADFREE

DESCRIPTION: 2.0 PIN HEADER DUAL ROW SMT TYPE