

Recommended P.C.B Layout

**MATERIAL**

Insulator : NY6T UL94-V0

Contact Pin : Brass

**SPECIFICATION**

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ±

ANG ± 3°

**煜倫股份有限公司**


[www.morethanall.com](http://www.morethanall.com)

SIZE A4

P PROJECTION

照片框

**ORDER INFORMATION**

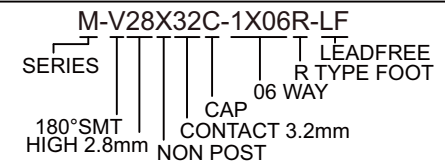

DESCRIPTION: PIN HEADER 2.00\*2.00mm SMT S/T TYPE, SINGLE ROW CAP+TUBE