





MATERIAL

Insulator : Nylon 6T
Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000MΩ Min. at DC 500V
Contact Resistance : 20mΩ Max. at DC 100mA
Operation Temperature : -55°C to +105°C

PARTNO.
M-V22X-1XxxR: A=4.2 B=4.0 C=2.2
M-V27X-1XxxR: A=4.2 B=4.0 C=2.7

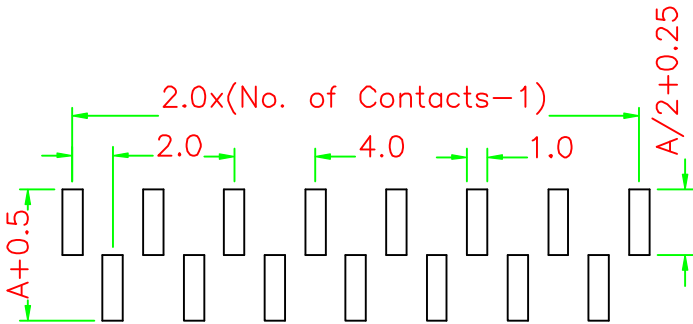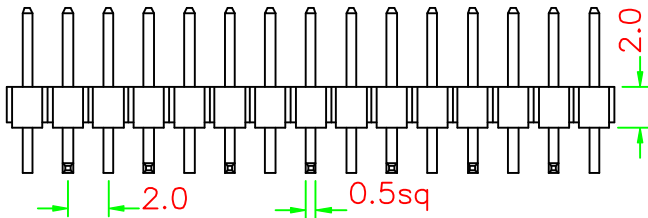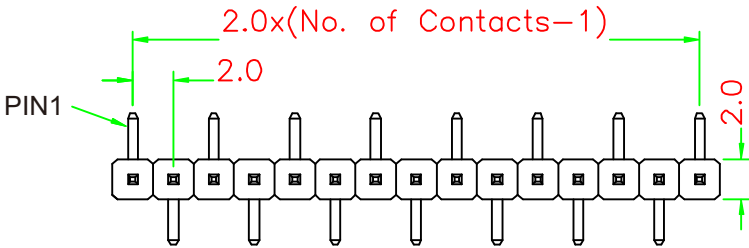

Recommended P.C.B. Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

M-VxxX-1XxxR-LF
SERIES
180°SMT
LEADFREE
R TYPE FOOT
1X02:02 WAY
1X40:40 WAY
NON POST
22:HIGH 2.2mm
27:HIGH 2.7mm

DESCRIPTION: 2.0MM PIN HEADER SMT TYPE