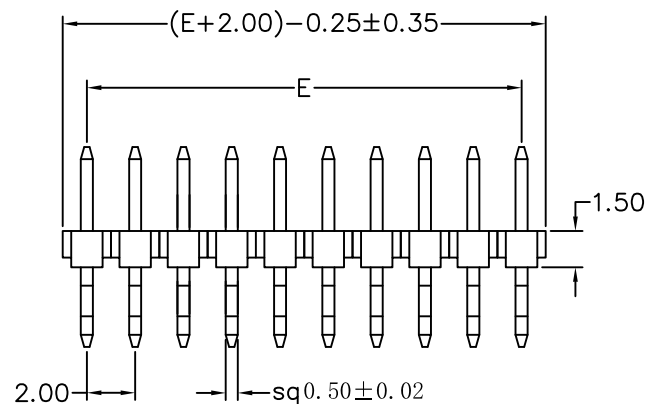


Recommended P.C.B Layout

MATERIAL

Insulator: NY6T UL94-V0

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 15mΩMax.

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

POLES	DIM E
2	2.00
3	4.00
4	6.00
5	8.00
6	10.00
7	12.00
8	14.00
9	16.00
10	18.00
11	20.00
12	22.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

照片框

ORDER INFORMATION

M-WX34-1Xxx-LF
SERIES LEADFREE
1X02:02WAY
1X40:40WAY
CONTACT 3.48mm
NON POST
90°SMT

DESCRIPTION: PIN HEADER 2.0*2.0mm SINGLE ROW, HORIZONTAL PIN TUBE