

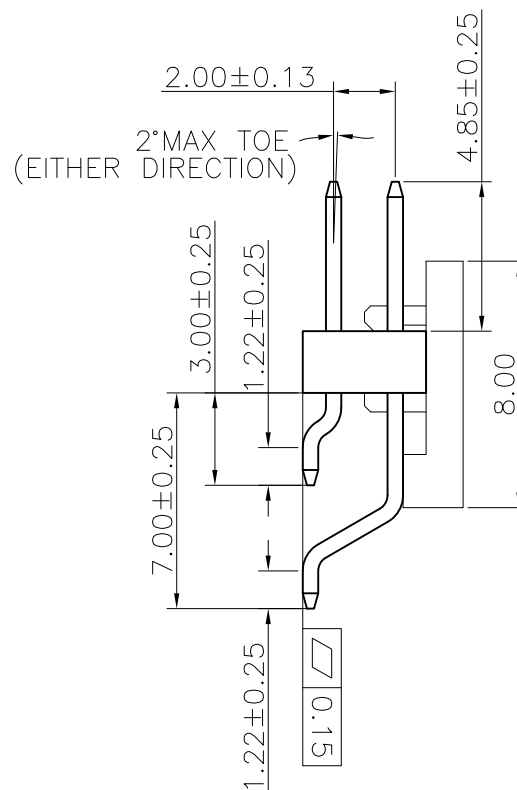
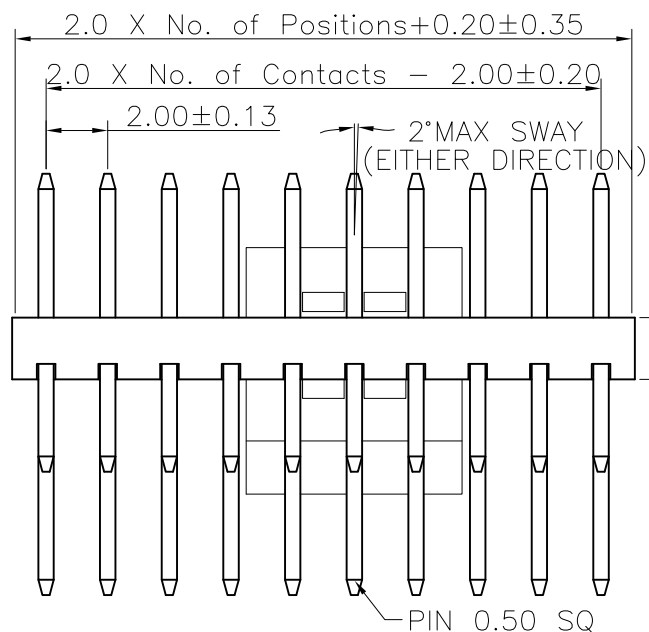


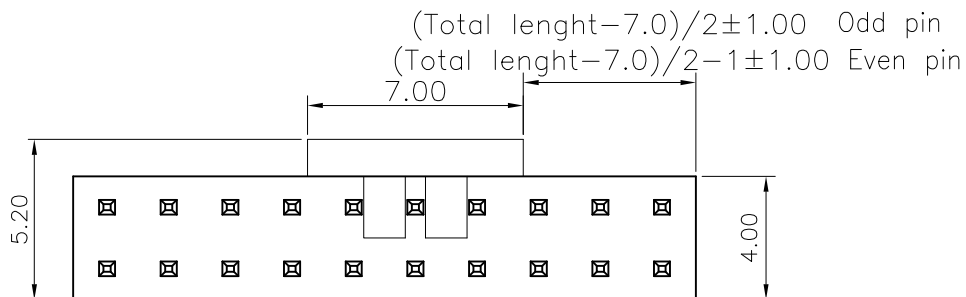

Specifications
Current Rating:2Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Brass
High Temperature Thermoplastic, UL 94V-0
Nylon or Equivalent Material

Recommended P.C.Board
Layout
(Tolerance:±0.05)

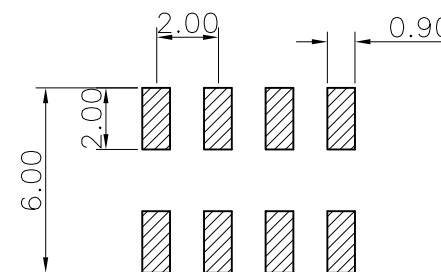

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

M-WX48C-2Xxx-LF
SERIES LEADFREE
2X02:04WAY
2X40:80WAY
90°SMT CAP
NON POST CONTACT 4.85mm

DESCRIPTION: 2.00 PIN HEADER DUAL ROWS SMT TYPE BASE 2.00H