

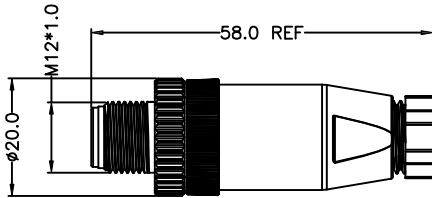


Detailed Product Description:
Waterproof connector rating is IP67
They can not be used permanently under water
Per ISO-20653,IEC60529

Other Specification
Contact PIN: Brass with Gold plating.
Coupling nut/screw: Brass with nickel plating
Insulation plastic: PA66+GF
Operating temperature: -25°C ~ +85°C




PLASTIC

*ALL MATERIALS ARE RoHS COMPLIANT.

Electrical character

Part Number	Contacts	Rated voltage		Rated current	Contact Resistance	Cable OD (mm)
		A/C	D/C			
M12-PABK58D06-05		60V	60V	4A	10mΩ	4~6

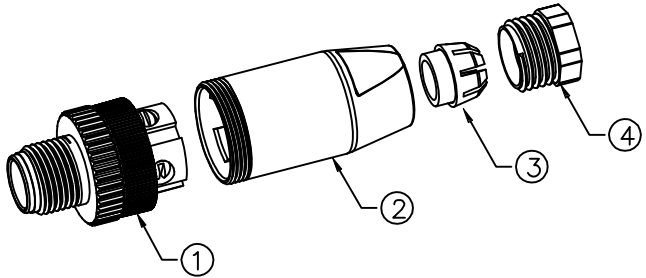

ITEM	Q,TY	SPECIFICATION
1	1set	M12 A CODING MALE CONNECTOR
2	1pcs	M12-PALSTIC ASSEMBLY SHELL
3	1set	PG7 WATERPROOF HOSE
4	1pcs	TAIL PLASTIC NUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

照片框

ORDER INFORMATION

M12-PABK58D06-05-LF

SERIES

MALE

BLACK

ASSEMBLY

LEADFREE

05 WAY

6.0mm DIA

LONG 58mm

DESCRIPTION: M12 A Code 5pin Male Assemble Connector(PG7)