
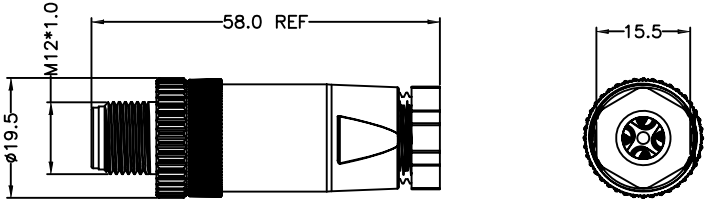


Detailed Product Description:  
Waterproof connector rating is IP67  
They can not be used permanently under water  
Per ISO-20653,IEC60529

Other Specification  
Contact PIN: Brass with Gold plating.  
Coupling nut/screw: Brass with nickel plating  
Insulation plastic: PA66+GF  
Operating temperature: -25°C ~ +85°C

\*ALL MATERIALS ARE RoHS COMPLIANT.




PLASTIC

Electrical character

Part Number	Contacts	Rated voltage		Rated current	Contact Resistance	Cable OD (mm)
		A/C	D/C			
M12-PABK58D06-05		60V	60V	4A	10mΩ	6~8

ITEM	Q,TY	SPECIFICATION
1	1set	M12 A CODING MALE CONNECTOR
2	1pcs	M12-PALSTIC ASSEMBLY SHELL
3	1set	PG9 WATERPROOF HOSE
4	1pcs	TAIL PLASTIC NUT

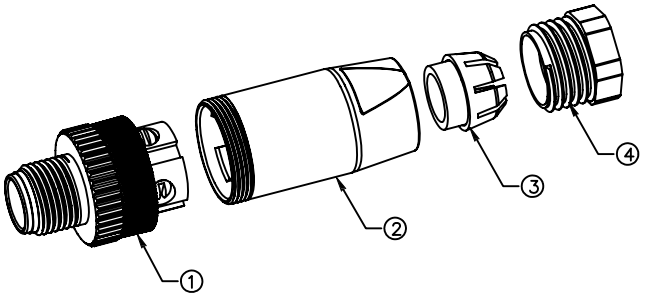

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

M12-PABK58D08-05-LF

SERIES

MALE

BLACK

ASSEMBLY

LONG 58mm

8.0mm DIA

05 WAY

LEADFREE

DESCRIPTION:M12 A-Code 5pin Male Assemble Connector(PG9)