


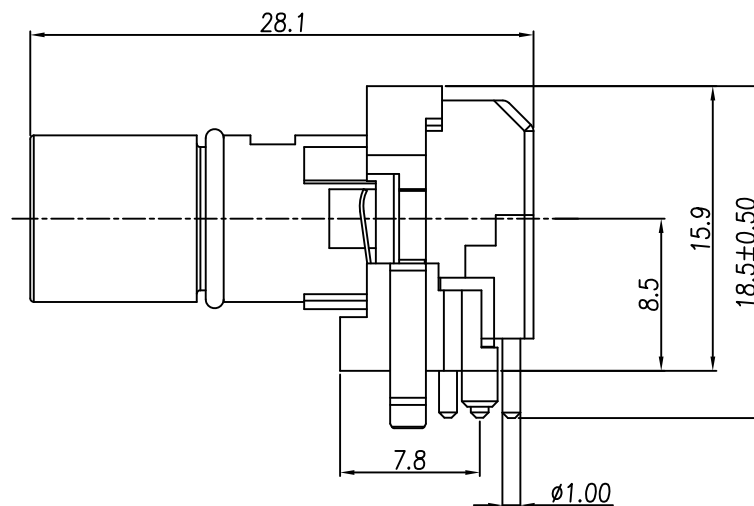
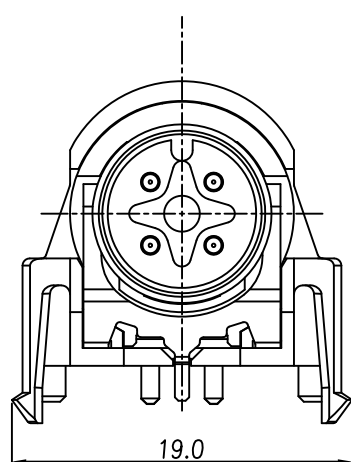


TABLE A

M12-PRLPMBK28-04	M12-PRLPMBK28-05

- MATERIAL :
 - 1-1. HOUSING : PA9T
 - 1-2. CONTACT : BRASS
 - 1-3. O-RING : VITON
 - 1-4. BACK HOUSING : PA9T
 - 1-5. DOWN HOUSING : PA9T
 - 1-6. GROUND : PHOSPHOR BRONZE
- FINISH :
 - 2-1. CONTACT : GOLD FLASH PLATED.
 - 2-2. GROUND : NICKEL PLATED.
- ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 4A
 - 3-2. Rated Voltage : 4PIN 250V ;5PIN 60V
 - 3-3. Water proof : IP67 (in mated condition)
- Environmental :
 - 4-1. Operation Temperature : -25℃~85℃

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°



PPOJECTION

照片框

ORDER INFORMATION

M12-PRLPMBK28-xx-LF
SERIES
MALE
DIP 90°
LOCK POST
LEADFREE
04.05 WAY
LONG 28.1mm
BLACK
METAL

DESCRIPTION: M12 A-CODING (M) Two-piece 90°

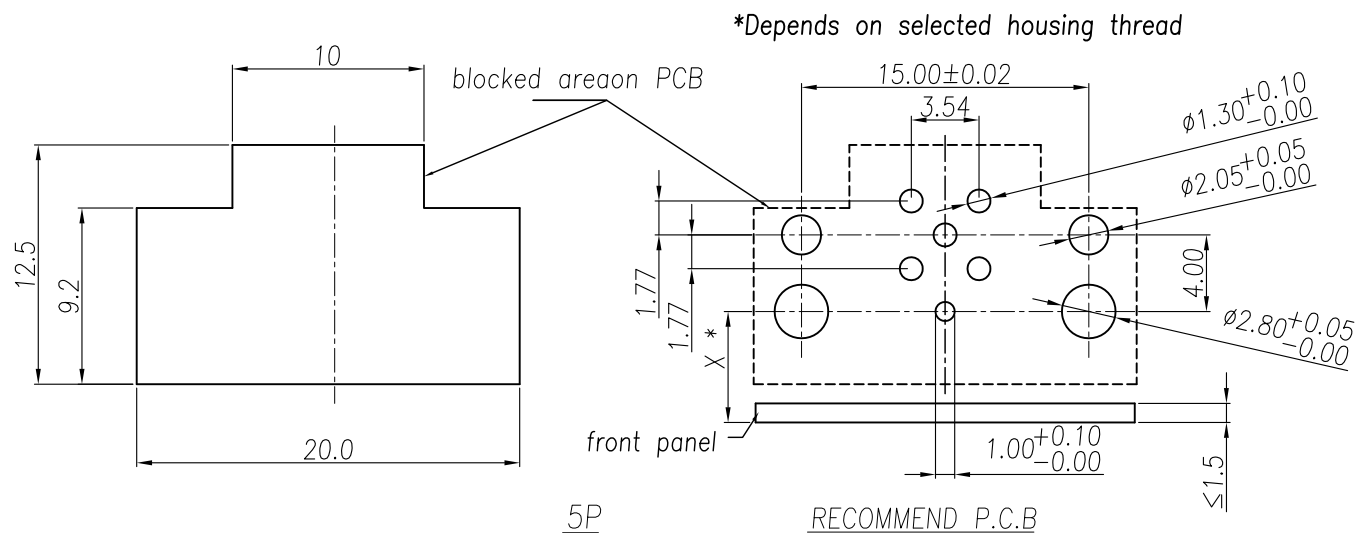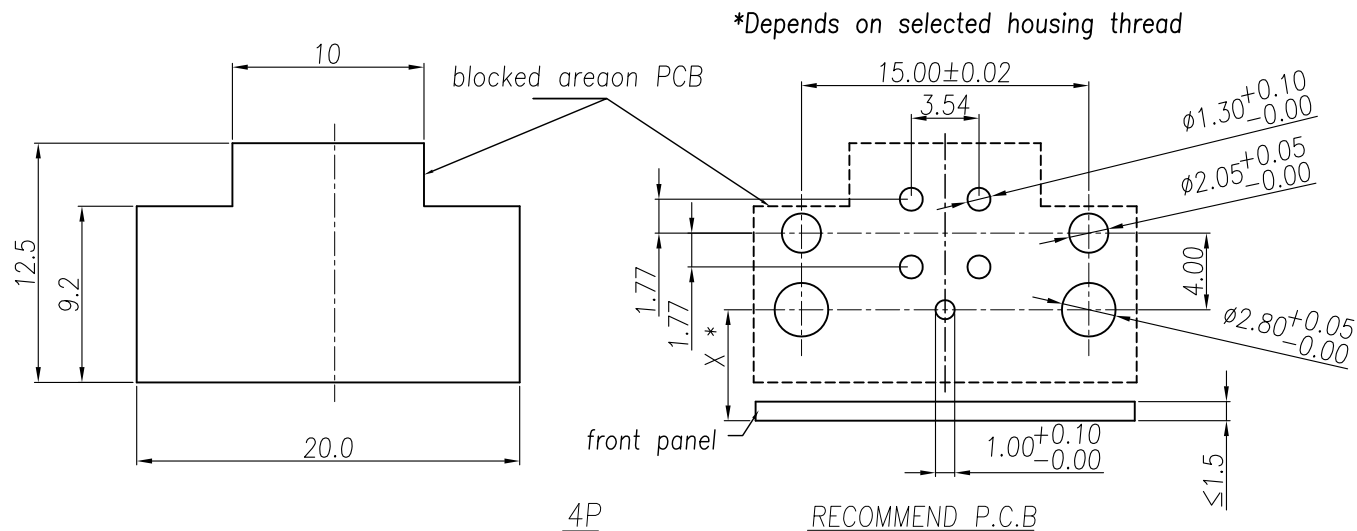

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

ORDER INFORMATION

M12-PRLPMBK28-xx-LF
SERIES
MALE
DIP 90°
LOCK POST
BLACK
METAL
LEADFREE
04.05 WAY
LONG 28.1mm

DESCRIPTION: M12 A-CODING (M) Two-piece 90°