

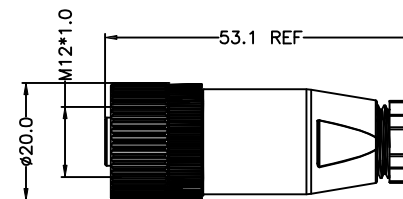


Detailed Product Description:
 Waterproof connector rating is IP67
 They can not be used permanently under water
 Per ISO-20653,IEC60529

Other Specification
 Contact PIN: Brass with Gold plating.
 Coupling nut/screw: Brass with nickel plating
 Insulation plastic: PA66+GF
 Operating temperature: -25°C ~ +85°C


*ALL MATERIALS ARE RoHS COMPLIANT.



PLASTIC

Electrical character

Part Number	Contacts	Rated voltage		Rated current	Contact Resistance	Cable OD (mm)
		A/C	D/C			
M12-SABK53D06-05		60V	60V	4A	10mΩ	4~6

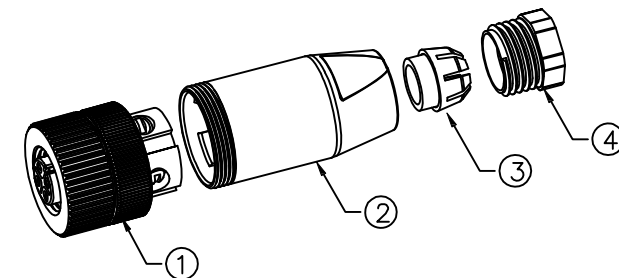

ITEM	Q,TY	SPECIFICATION
1	1set	M12 A CODING FEMALE CONNECTOR
2	1pcs	M12-PALSTIC ASSEMBLY SHELL
3	1set	PG7 WATERPROOF HOSE
4	1pcs	TAIL PLASTIC NUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

M12-SABK53D06-05-LF
 SERIES | | | | LEADFREE
 | | | | 05 WAY
 | | | | 6.0mm DIA
 | | | | LONG 53.1mm
 FEMALE | BLACK
 | ASSEMBLY

DESCRIPTION: M12 A Code 5pin Female Assemble Connector(PG9)