


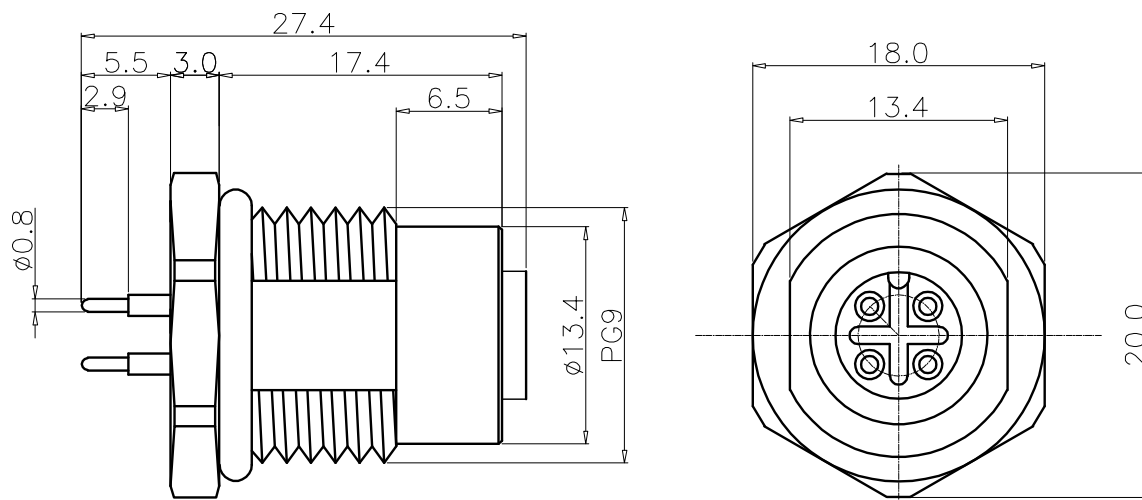


TABLE A

M12-SDPBNOPG9-05	M12-SDPBNOPG9-03
M12-SDPBNOPG9-04	M12-SDPBNOPG9-02

- MATERIAL :
 - HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - CONTACT : BRASS
 - NUT : BRASS
 - SHELL : BRASS
 - O-RING : EPDM ; COLOR : BLACK
- FINISH :
 - CONTACT : SEE TABLE A
UNDER PLATE : NICKEL
 - NUT : NICKEL PLATED
 - SHELL : NICKEL PLATED
- ELECTRICAL SPECIFICATION :
 - Rated current : 4A
 - Rated Voltage : 2~4PIN 250V ; 5PIN 60V
 - Water proof : IP67/IP68
- Environmental :
 - Operation Temperature : -40℃~85℃

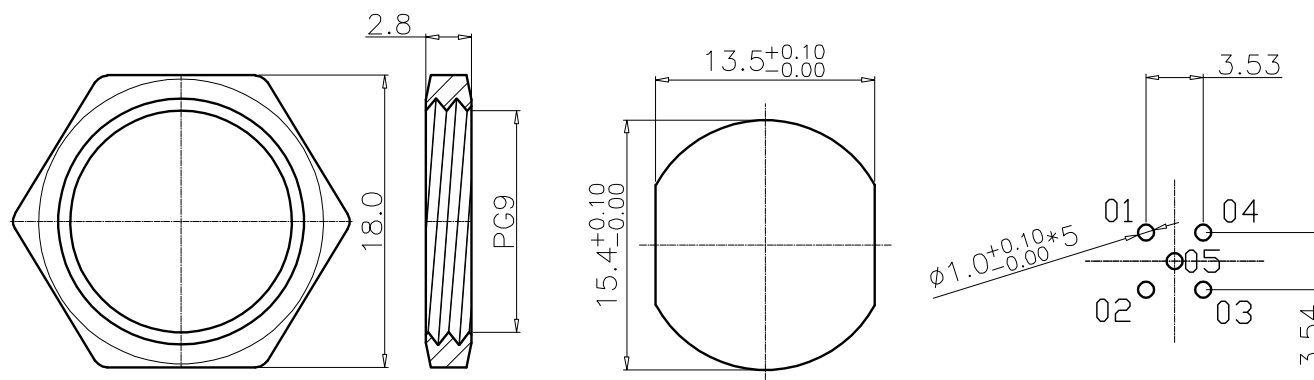

NUT

RECOMMEND PANEL CUT-OUT RECOMMEND P.C.B LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

M12-SDPBNOPG9-xx-LF
SERIES | | | | LEADFREE
FEMALE | | | | 02-05 WAY
O-RING
NUT
PANEL BACK
DIP 180°

DESCRIPTION: 防水頭 M12 A-Code (F) 前鎖 Pg9 插件式