

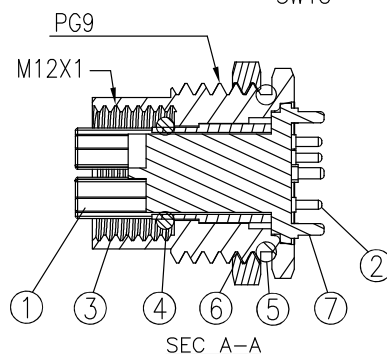

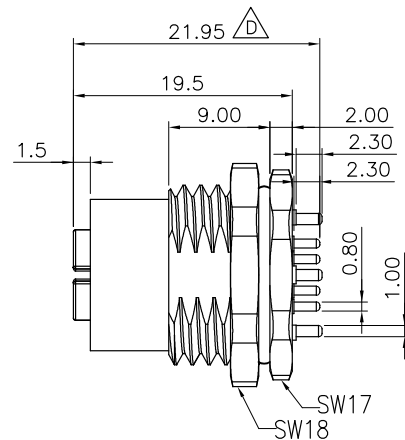


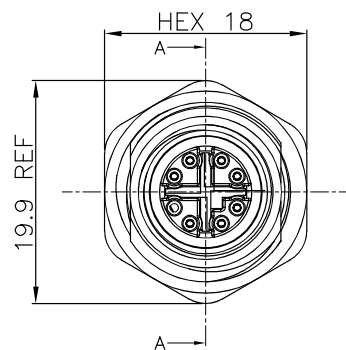


Specifications:
 Current Rating:0.5A
 Voltage Rating:DC:60V AC:50V
 Contact Resistance:15m ohm. Max.
 Insulation Resistance:100M ohm. Min.
 Withstanding Voltage:500V AC/Minute
 Operating Temperature Range:-25°C ~ +85°C
 Mechanical Performance
 Insertion/Withdrawal Meet IEC 61076-2-109 Requirements.
 Durability:500 Cycles Min.
 IP Rating:IP67 in locked condition


Pin Assignments Front View



ITEM	Description	Material	Remark	Q'TY
1	Insulator	Nylon	UL94V-0 Black	1
2	Terminal	Brass	Gold Plated	8
3	Shell	Zinc Alloy	Nickel Plated	1
4	Seal ring	Silicone	Black	1
5	Seal ring	Silicone	Black	1
6	Nut	Copper Alloy	Nickel Plated	1
7	Shielding	Zinc Alloy	Nickel Plated	1



PG9 Recommended
 Panel CUT-Out
 Thickness:4.0mm

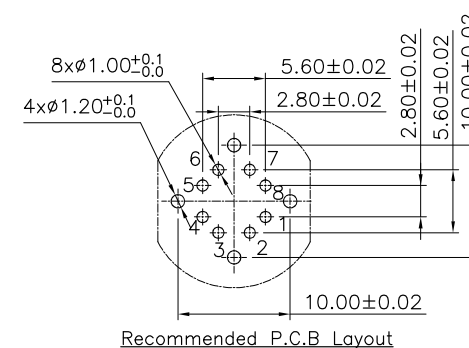

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

M12-SDPBON15-08X-LF
 SERIES
 FEMALE
 DIP 180°
 NUT
 O-RING
 PANEL BACK
 LEADFREE
 08 WAY / X CODE
 15.4 DIA

DESCRIPTION: M12 8PIN X CODE SOCKET PCB TYPE