


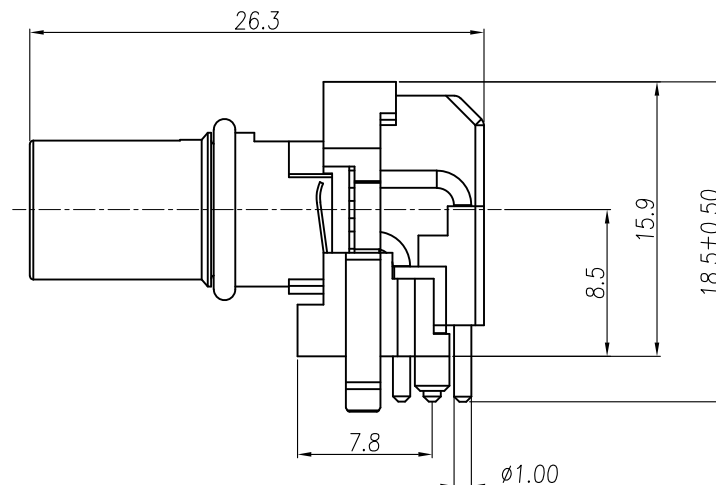
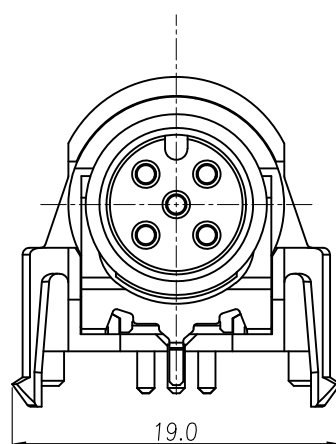


TABLE A

M12-SRLPMBK26-02	M12-SRLPMBK26-03	M12-SRLPMBK26-04	M12-SRLPMBK26-05

1. MATERIAL :

- 1-1. HOUSING : PA9T
- 1-2. CONTACT : BRASS
- 1-3. O-RING : VITON
- 1-4. BACK HOUSING : PA9T
- 1-5. DOWN HOUSING : PA9T
- 1-6. GROUND : PHOSPHOR BRONZE

2. FINISH :

- 2-1. CONTACT : GOLD FLASH PLATED.
- 2-2. GROUND : NICKEL PLATED.

3. ELECTRICAL SPECIFICATION :

- 3-1. Rated current : 4A
- 3-2. Rated Voltage : 2~4PIN 250V ;5PIN 60V
- 3-3. Water proof : IP67 (in mated condition)

4. Environmental :

- 4-1. Operation Temperature : -25℃~85℃

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°


照片框

ORDER INFORMATION

M12-SRLPMBK26-xx-LF
SERIES | | | | | LEADFREE
FEMALE | | | | | 02-05 WAY
DIP 90° | | | | | LONG 26.3mm
LOCK POST | | | | | BLACK
METAL

DESCRIPTION: M12 A-CODING (F) Two-piece 90度


*Depends on selected housing thread

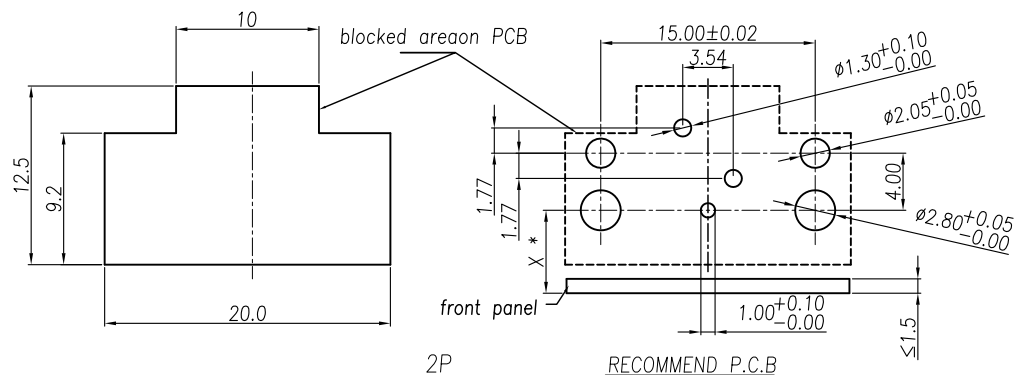

2P

RECOMMEND P.C.B


*Depends on selected housing thread

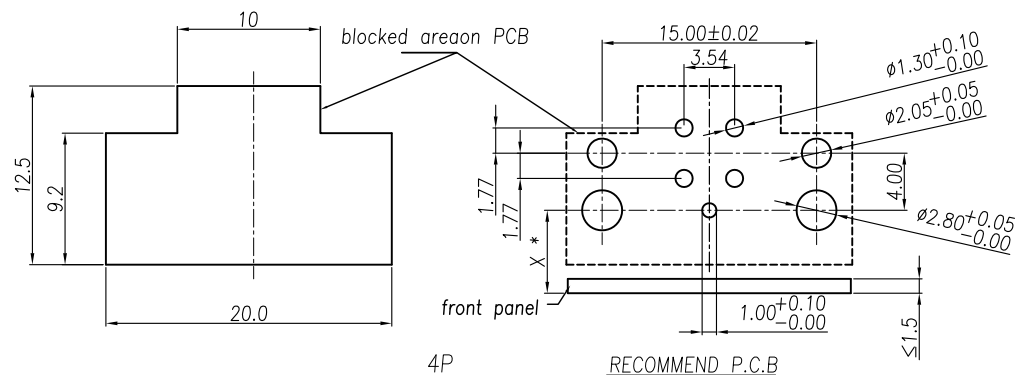

4P

RECOMMEND P.C.B


*Depends on selected housing thread

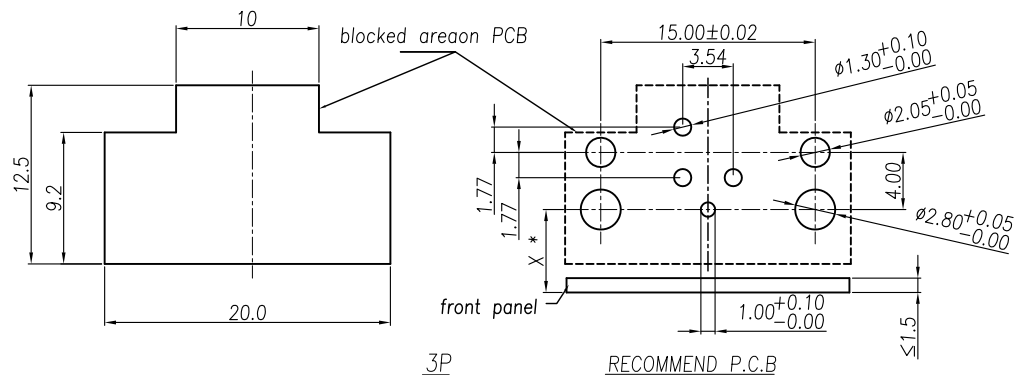

3P

RECOMMEND P.C.B

*Depends on selected housing thread

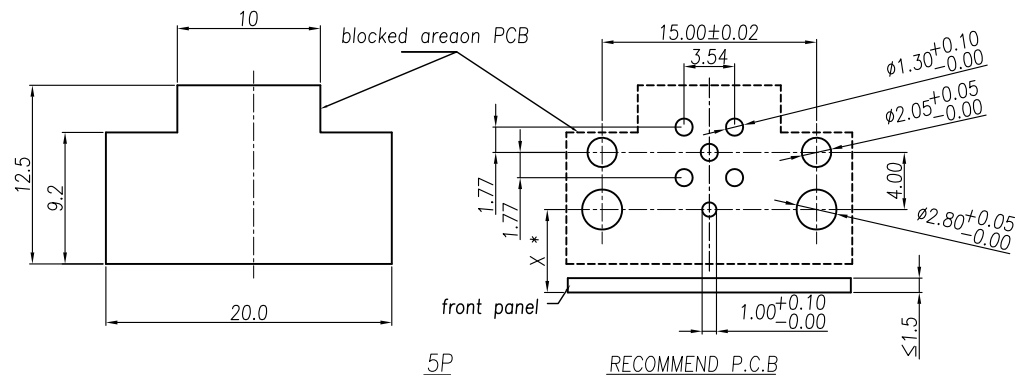

5P

RECOMMEND P.C.B

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

M12-SRLPMBK26-xx-LF
SERIES
FEMALE
DIP 90°
LOCK POST
LEADFREE
02-05 WAY
LONG 26.3mm
BLACK
METAL

DESCRIPTION: M12 A-CODING (F) Two-piece 90°