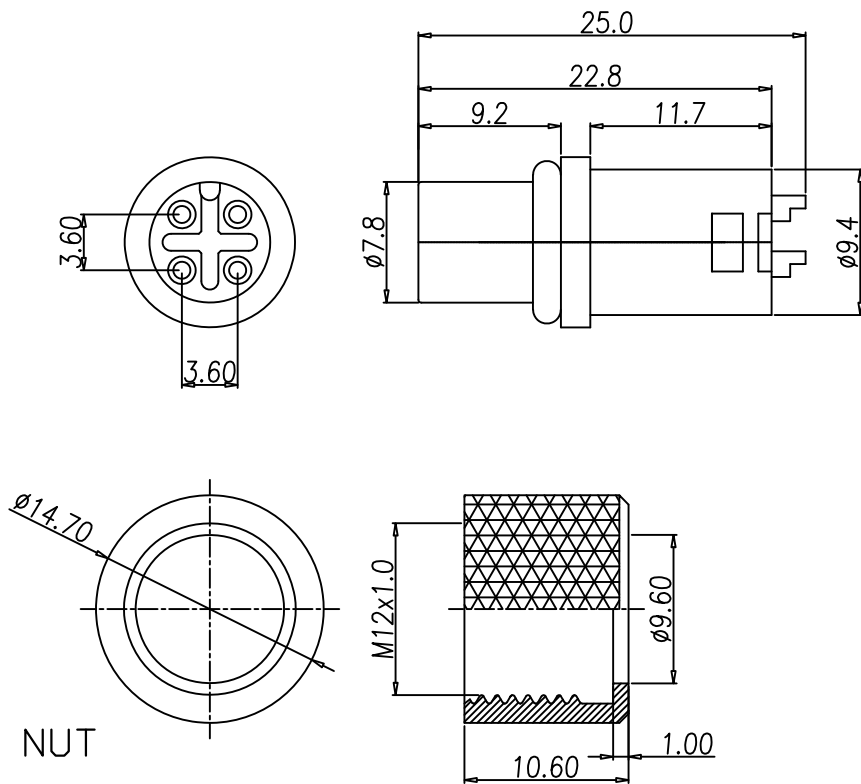








TABLE A

		
3PIN	4PIN	5PIN
M12-SS-032	M12-SS-04	M12-SS-05
		
2PIN	2PIN	3PIN
M12-SS-021	M12-SS-022	M12-SS-031

- MATERIAL :
 - 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : BRASS
 - 1-3. NUT : SEE TABLE A
 - 1-4. O-RING : EPDM ; COLOR ; BLACK(7.5*1.5)
- FINISH :
 - 2-1. CONTACT : SEE TABLE A ; UNDER PLATE : NICKEL
 - 2-2. NUT : SEE TABLE A
- ELECTRICAL SPECIFICATION :
 - 3-1. RATED CURRENT: 4A
 - 3-2. RATED VOLTAGE : 2~4PIN 250V ; 5PIN 60V
 - 3-3. WATER PROOF: IP67
- ENVIRONMENTAL :
 - 4-1. OPERATION TEMPERATURE : -40℃~85℃

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

照片框

ORDER INFORMATION

M12-SS-xx-LF
SERIES T LEADFREE
021.022.031.032.04.05 WAY
SOLDER
FEMALE

DESCRIPTION: 防水頭 (F) 線端(膠芯L=22.8)