
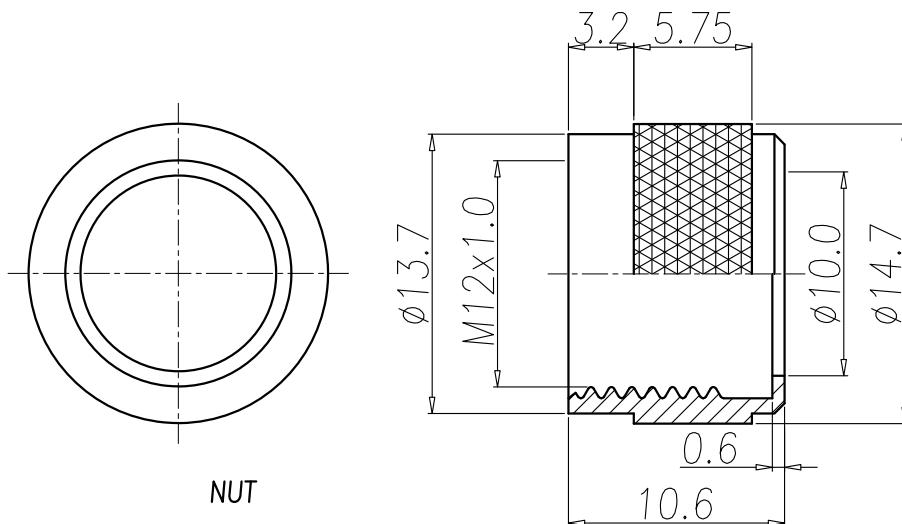
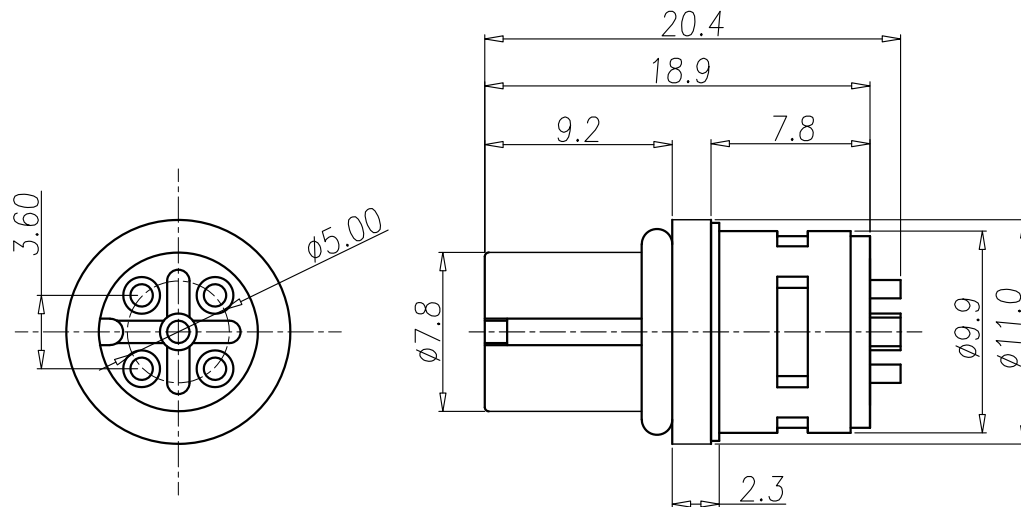








NUT

1. MATERIAL :
 - 1-1. HOUSING : SEE TABLE A ; COLOR : BLACK
 - 1-2. CONTACT : BRASS
 - 1-3. NUT : BRASS
 - 1-4. O-RING : EPDM; COLOR : BLACK(7.5*1.5)
 - 1-5. SHELL : BRASS
2. FINISH :
 - 2-1. CONTACT : SEE TABLE A
UNDER PLATE : NICKEL
 - 2-2. NUT : NICKEL
 - 2-3. SHELL : BRIGHT TIN
3. ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 4A
 - 3-2. Rated Voltage : 2PIN~4PIN 250V ; 5PIN 60V
 - 3-3. Water proof: IP68
4. Environmental :
 - 4-1. Operation Temperature : -40℃~105℃

		
5PIN	4PIN	3PIN
M12-SS20-05	M12-SS20-04	M12-SS20-031
		
	3PIN	2PIN
	M12-SS20-032	M12-SS20-022

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

M12-SS20-xx-LF

SERIES

LEADFREE

021.022.031.032.04.05 WAY

LONG 20.4mm

SOLDER

FEMALE

DESCRIPTION: M12 (F) 焊線式螺母壓花(接地剖溝)