
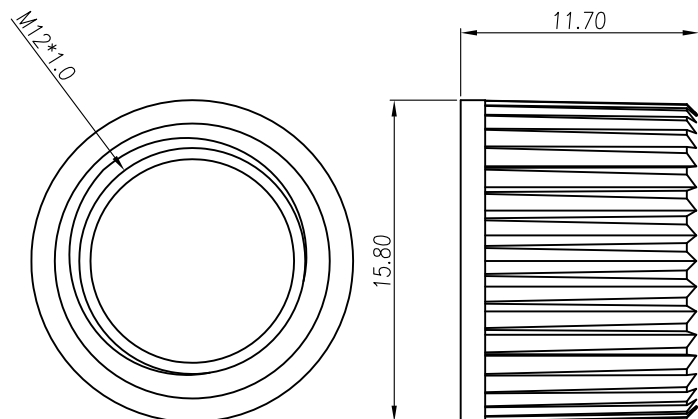


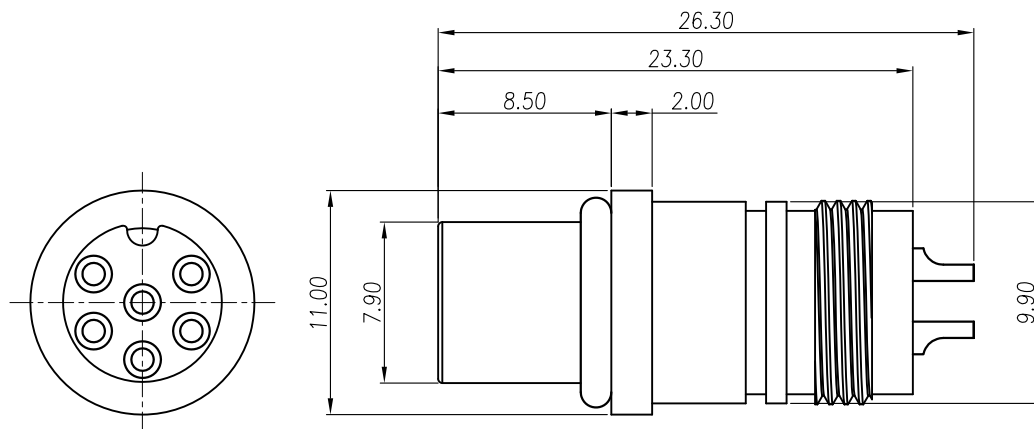

1. MATERIAL :
 - 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : BRASS
 - 1-3. NUT : PBT UL94V-0 ; COLOR : BLACK
 - 1-4. O-RING : EPDM
 - 1-5. Epoxy : EF400A&EF400B.COLOR:BLACK
2. FINISH :
 - 2-1. CONTACT : GOLD FLASH.
 - UNDER PLATE : NICKEL
3. ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 5A
 - 3-2. Rated Voltage : 125V
 - 3-3. Water proof: IP67
4. Environmental :
 - 4-1. Operation Temperature : -20℃~85℃

TABLE A

M12-SSBK-06	
M12-SSBK-05	M12-SSBK-04
M12-SSBK-03	M12-SSBK-02

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

照片框

ORDER INFORMATION

M12-SSBK-xx-LF
SERIES LEADFREE
02-06 WAY
BLACK
SOLDER
FEMALE

DESCRIPTION: M12防水頭 (F) 屏蔽式