

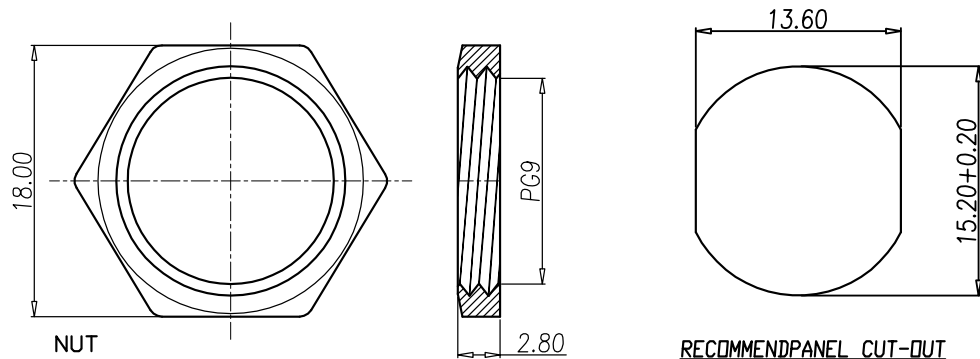
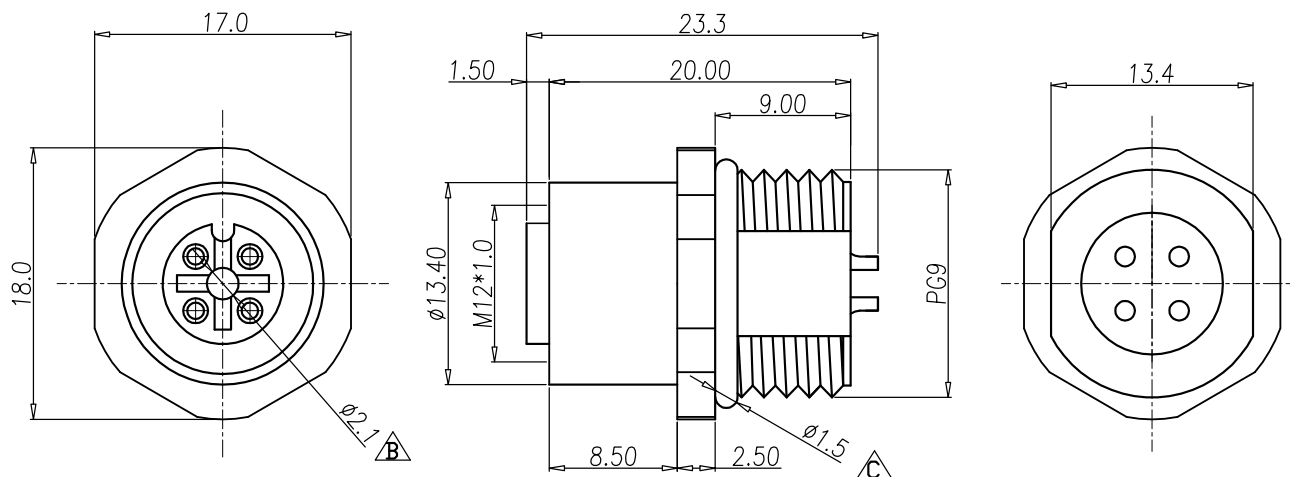


TABLE A

4PIN	5PIN
M12-SSPANOPG9-04	M12-SSPANOPG9-05
2PIN	3PIN
M12-SSPANOPG9-02	M12-SSPANOPG9-03

1. MATERIAL :
- 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : BRASS
 - 1-3. SHELL : BRASS
 - 1-4. NUT : BRASS
 - 1-5. O-RING A : EPDM ; COLOR : BLACK
 - 1-6. O-RING B : SILICONE ; COLOR : GREEN.
2. FINISH :
- 2-1. CONTACT : GOLD FLASH.
 - UNDER PLATE : NICKEL
 - 2-2. SHELL : NICKEL PLATED.
 - 2-2. NUT : NICKEL PLATED.
3. ELECTRICAL SPECIFICATION :
- 3-1. Rated current : 4A
 - 3-2. Rated Voltage : 2~4PIN 250V ; 5PIN 60V
 - 3-3. Water proof : IPX7
4. Environmental :
- 4-1. Operation Temperature : -40℃~105℃

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

照片框

ORDER INFORMATION

M12-SSPANOPG9-xx-LF
SERIES T T T T LEADFREE
FEMALE NUT PANEL FRONT
SOLDER 02-05 WAY

DESCRIPTION: WP M12 (F) A-Code 板端後側PG9焊線式